




TM

Aztec Chemicals

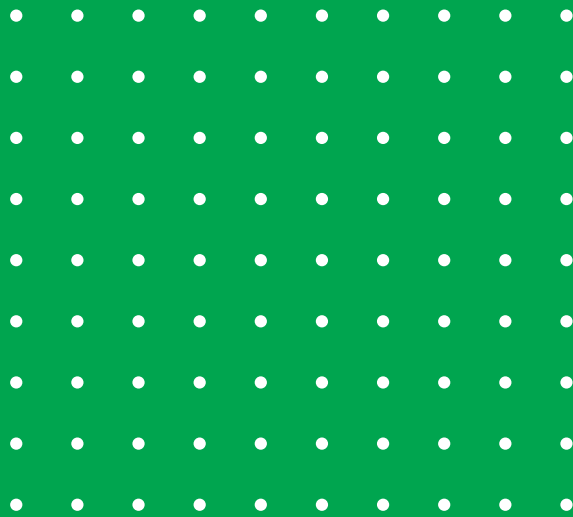

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

**POLYETHYLENE SPILL
CONTAINMENT AND
STORAGE RANGE**

POLY-OVERPACK[®] 95 SALVAGE DRUM

IS YOUR OVERPACK REALLY A SALVAGE DRUM?

Our Poly-Overpack 95 meets Group 1 packaging standards and salvage drum regulations (unlike competitive overpacks). The Poly-Overpack 95 safely contains a wide range of hazardous materials - including acids, corrosives and damaged parts - in 55-gallon drums.

Tight, secure and leak-free container closing is simple: just place any long object, like a wooden two-by-four, in the handy lid slots and turn it to screw the lid down tightly.



Twist-down lid for safe closure

Closed cell gasket in lid helps seal closure

Patented castellations in lid allow for easy closing with pole or wooden two-by-four

Double wall lid gives added strength

Molded area allows for easy gripping and pick-up by material handling equipment

Patented ribbed design provides extra strength

100% UV-protected polyethylene provides protection over a wide range of chemicals



Can be moved with standard material handling equipment.



Nestable design for efficient storage.



Drum truck portable.



Drum Lifter lifts and lowers 55-gallon drums with ease! Safely lifts steel drums up to 1,000 lbs. and fits both open and closed-head designs. Tension spring adapts to diameter of drum. (Product No. 3100-BU)

Most overpack situations can be handled using one of the following techniques.



Inverted Overpack Technique
Place the damaged drum on the overpack lid. Slide the overpack over the drum. Rotate them upright.



Roller Technique
Place the damaged drum on its side with 1 to 2-inch metal rollers underneath it (water pipe works fine). Place the overpack so that the damaged drum can be rolled most of the way into the overpack. Then turn the overpack upright.



Drum Lifting Technique
A Drum Lifter is attached to the damaged drum. Then a crane, forklift or hoist lifts the drum into the overpack.



Angle Roll Technique
Place the damaged drum and overpack end-to-end at an obtuse angle. Both are rolled simultaneously so that the drum works its way into the overpack. When inward progress stops, reverse the original angle and roll in the opposite direction. Continue the process until the drum is in the overpack. Then turn the overpack upright.

SPECIFICATIONS

POLY-OVERPACK® 95

Product No.: 1237-YE

Dimensions

Top Diameter: Ext. / 31.75" / 81 cm
Int. / 27" / 69 cm

Bottom Diameter: Ext. / 26" / 66 cm
Int. / 24.75" / 63 cm

Height: Ext. / 41.5" / 105 cm
Int. / 37" / 94 cm

Weight: 48 lbs. / 21.6 kg

Handling Capacity: 650 lbs. / 292.5 kg

Sump Capacity: 95 gal. / 361 liters

Regulations: UN 1H2/X295/S,
UN 1H2T/Y295/S,
DOT 49 CFR 173.3(c),
EPA, SPCC and NPDES

POLY-OVERPACK® 95T

Product No.: 1137-YE

Dimensions

Top Diameter: Ext. / 35" / 89 cm
Int. / 27" / 69 cm

Bottom Diameter: Ext. / 26" / 66 cm
Int. / 24.75" / 63 cm

Height: Ext. / 41.5" / 105 cm
Int. / 37" / 94 cm

Weight: 54.5 lbs. / 24.5 kg

Handling Capacity: 650 lbs. / 292.5 kg

Sump Capacity: 95 gal. / 361 liters

Regulations: UN 1H2/X295/S,
DOT 49 CFR 173.3(c),
EPA, SPCC and NPDES

POLY-OVERPACK® 110

Product No.: 1240-YE

Dimensions

Top Diameter: Ext. / 31.75" / 81 cm
Int. / 27" / 69 cm

Bottom Diameter: Ext. / 26" / 66 cm
Int. / 24.75" / 63 cm

Height: Ext. / 45" / 114 cm
Int. / 40.5" / 103 cm

Weight: 50.5 lbs. / 22.7 kg

Handling Capacity: 650 lbs. / 292.5 kg

Sump Capacity: 105 gal. / 399 liters

Regulations: UN 1H2/X295/S,
DOT 49 CFR 173.3(c),
EPA, SPCC and NPDES



WE HAVE OVERPACKS IN SMALL, MEDIUM, LARGE & HUGE!

POLY-OVERPACK® 95T SALVAGE DRUM

CUTS REMEDIATION TIME IN HALF.

Poly-Overpack 95T meets Group 1 packaging standards and salvage drum regulations. Patented Tight Grip™ handles let you tighten and open lids in half the time with fewer people! The Poly-Overpack 95T incorporates the same structural features as the regular Poly-Overpack 95.

You get the same benefits in an even easier-to-tighten package. Meets performance-oriented packaging requirements of U.S. DOT and UN regulations.



POLY-OVERPACK® 110 SALVAGE DRUM

IDEAL FOR DISTORTED OR BOWED DRUMS.

Containing irregular drums is not a problem with this handy-size overpack. All the great performance features of the Poly-Overpack 95, but built taller to handle those misshapen drums.



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



WE HAVE OVERPACKS IN SMALL, MEDIUM, LARGE & HUGE!
Whatever your need, we have the size.

POLY-OVERPACK® 65 SALVAGE DRUM

JUST THE RIGHT SIZE FOR 30-GALLON DRUMS.

Our Poly-Overpack 65 meets Group 1 packaging standards, Salvage Drum regulations, and is designed to fit 30-gallon drums. This overpack nests for easy storage and has a gasket in the lid for secure containment. No wasted space! No wasted money!

GREAT AS A SPILL KIT CONTAINER!



It's light enough for one person to handle and large enough to pack sufficient absorbent and response equipment for incidental spills.



SPECIFICATIONS

POLY-OVERPACK® 65

Product No.:	1065-YE
Dimensions	
Top Diameter:	Ext. / 28.25" / 72 cm Int. / 23.5" / 60 cm
Bottom Diameter:	Ext. / 23" / 58 cm Int. / 21.75" / 55 cm
Height:	Ext. / 37.37" / 95 cm Int. / 33.5" / 85 cm
Weight:	45 lbs. / 20.5 kg
Handling Capacity:	440 lbs. / 200 kg
Sump Capacity:	65 gal. / 247 liters
Regulations:	UN 1H2/X200/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES

WHEELED OVERPACK® 95

Product No.:	1299-YE
Dimensions	
Top Diameter:	Ext. / 32" / 81 cm Int. / 27" / 69 cm
Bottom Diameter:	Ext. / 36" / 91 cm Int. / 25" / 64 cm
Height:	Ext. / 47" / 119 cm Int. / 37" / 94 cm
Weight:	56 lbs. / 25 kg
Handling Capacity:	250 lbs. / 113 kg
Sump Capacity:	95 gal. / 361 liters
Regulations:	UN 1H2/X113/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES

WHEELED OVERPACK® 50

Product No.:	1259-YE
Dimensions	
Top Diameter:	Ext. / 24.5" / 62 cm Int. / 20" / 50 cm
Bottom Diameter:	Ext. / 18.5" / 47 cm Int. / 17.75" / 45 cm
Height:	Ext. / 39.5" / 100 cm Int. / 34.5" / 87 cm
Weight:	38 lbs. / 17 kg
Handling Capacity:	275 lbs. / 125 kg
Sump Capacity:	50 gal. / 190 liters
Regulations:	UN 1H2/X125/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES

WHEELED OVERPACK™ SALVAGE DRUMS

AZTEC's Wheeled Overpacks™ are the first mobile one-piece overpacks on wheels that can handle 55-gallon drums.

A Salvage Drum and dolly all in one, they eliminate the need for a separate dolly for transportation. The 95-gallon, and the 50-gallon polyethylene UN rated Salvage Drums have the built-in handles and 6" Polyolefin wheels, that allow for easy steering through doorways or around any obstacle. They are also ideal for Spill Kits.



POLY-OVERPACK® 20

Product No.: 1220-YE
Dimensions
Top Diameter: Ext. / 23" / 58.42 cm
Int. / 21.5" / 56.61 cm
Bottom Diameter: Ext. / 18" / 45.72 cm
Int. / 17" / 43.18 cm
Height: Ext. / 19" / 48.26 cm
Int. / 17.5" / 43.18 cm
Weight: 10 lbs. / 24.54 kg
Handling Capacity: 166 lbs. / 75 kg
Sump Capacity: 20 gal. / 51 liters
Regulations: UN 1H2/X75/S,
DOT 49 CFR 173.3 (c),
EPA, SPCC and NPDES

POLY-OVERPACK® 30

Product No.: 1230-YE
Dimensions
Top Diameter: Ext. / 23" / 58.42 cm
Int. / 21.5" / 56.61 cm
Bottom Diameter: Ext. / 18" / 45.72 cm
Int. / 17" / 43.18 cm
Height: Ext. / 30" / 76 cm
Int. / 28.5" / 72 cm
Weight: 13 lbs. / 6 kg
Handling Capacity: 221 lbs. / 100 kg
Sump Capacity: 30 gal. / 114 liters
Regulations: UN 1H2/X100/S,
DOT 49 CFR 173.3 (c),
EPA, SPCC and NPDES

POLY-OVERPACK® 600

Product No.: 1051-YE
Dimensions
Top Diameter: Ext. / 60" / 152 cm
Int. / 51.25" / 130 cm
Bottom Diameter: Ext. / 49.25" / 125 cm
Int. / 47.75" / 121 cm
Height: Ext. / 70" / 178 cm
Int. / 66" / 168 cm
Weight: 225 lbs. / 101.25 kg
Handling Capacity: 5000 lbs. / 2250 kg
Sump Capacity: 600 gal. / 2271 liters
Regulations: EPA 40 CFR 761.65,
SPCC and NPDES

POLY-OVERPACK® 180T

Product No.: 1180-YE
Dimensions
Top Diameter: Ext. / 40.25" / 102 cm
Int. / 31.38" / 79 cm
Bottom Diameter: Ext. / 30.5" / 77 cm
Int. / 29" / 73 cm
Height: Ext. / 57" / 145 cm
Int. / 51.25" / 130 cm
Weight: 116 lbs. / 52.2 kg
Handling Capacity: 2500 lbs. / 1125 kg
Sump Capacity: 180 gal. / 684 liters
Regulations: EPA 40 CFR 761.65,
SPCC and NPDES

POLY-OVERPACK® 20 & 30 SALVAGE DRUMS

BIG FEATURES AND BIG SAVINGS!

New 20 & 30-gallon Salvage Drums are versatile units that can directly contain solids and sludges with security. With a 1/2 turn lid, this ergonomically designed unit allows for easy access, unlike traditional "hoop-ring designs." The 20-gallon unit accepts bottles, cans and 5-gallon pails...while the 30-gallon unit can contain up to 16-gallon drums. Units are also nestable, which allows for ease of shipment.



POLY-OVERPACK® 600 OVERPACK DRUM

A HUGE 600-GALLON CAPACITY.



Designed specifically for the storage and transport of large transformers, the Poly-Overpack 600 offers an easy, cost-effective way to keep hazardous fluids under control.

IT'S
HUGE!



POLY-OVERPACK® 180T OVERPACK DRUM

IDEAL FOR UTILITIES IN TRANSPORTING
AND STORING TRANSFORMERS.

The Poly-Overpack 180T offers a large, 180-gallon capacity to handle the big jobs while its Tight Grip feature saves time and money.

YOU
SHOULD
USE...

OVERPACKS to provide protection for packages of solids -OR- for convenience in handling a package or consolidating packages of solids. SALVAGE DRUMS for the transport of damaged or leaking drums of hazardous liquids and hazardous materials that have spilled or leaked.



For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

DISPENSING HANDLING IS A CINCH. POLY-DOLLY®



A U-shaped barrel platform and double looped strap make for easy loading.
A lightweight design, kick plate, and rolled-grip handles make for easy tipping.
Large 10" wheels and ergonomic design make transport trouble free.

The common dolly has been rattling around industrial plants for 200 years virtually unchanged in design and function. It has been a good tool, but not efficient enough. Poly-Dolly, the multi-functional two wheel dispensing station, takes the dolly out of the Industrial Revolution and into the 21st Century.

With Poly-Dolly, mobile dispensing is no longer a cumbersome, risky business. It transports 55-gallon drums with ease, tilts to become an efficient self-dispensing station, and acts as its own secondary containment unit. By reducing unnecessary and dangerous drum handling, Poly-Dolly protects workers, improves efficiency and helps improve profits.

Made of long-lasting tough polyethylene, Poly-Dolly is strong enough to withstand daily bumps and scuffs and will not rust or corrode. That is why companies are saying: "Goodbye dolly. Hello Poly-Dolly."



POLY-DOLLY® CONVERSION KIT

Sold separately, the Conversion Kit comes complete with pneumatic rubber wheels and washers. Everything you need to convert the Poly-Dolly into an ATD in just a few simple steps.



UNIVERSAL® WELL LINER

The Universal Well Liner provides extra spill protection. To reclaim spilled material, just lift up the liner...no cleaning, wiping or scrubbing.



POLY-DOLLY® COVER

Protect your Poly-Dolly from outdoor elements with this durable vinyl cover that fits snugly over the top.

SPECIFICATIONS

POLY-DOLLY®

Product No.:	5300-YE
Dimensions:	69" L x 32.5" W x 26.5" H 175 cm x 82 cm x 67 cm
Weight:	98 lbs. / 44.5 kg
Load Bearing	
Capacity UDL:	600 lbs. / 270 kg
Sump Capacity:	80 gal. / 304 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

POLY-DOLLY® ATD

Product No.:	5300-YE-A
Dimensions:	69" L x 32.5" W x 26.5" H 175 cm x 82 cm x 67 cm
Weight:	103 lbs. / 46.7 kg
Load Bearing	
Capacity UDL:	600 lbs. / 270 kg
Sump Capacity:	80 gal. / 304 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

UNIVERSAL® WELL LINER

Product No.:	6005-BK
Dimensions:	12.75" L x 15.5" W x 2.5" H 32 cm x 39 cm x 6 cm
Weight:	1 lb. / 45 kg
Sump Capacity:	0.5 gal. / 1.9 liters


POLY-DOLLY® CONVERSION KIT

Product No.:	5311-BK
Dimensions:	4" W x 10" H 10 cm x 25 cm
Weight*:	3.6 lbs. / 1.6 kg

*Listed size and weight is per wheel

POLY-DOLLY® COVER

Product No.:	5312-YE
Dimensions:	56" L x 34 W x 26" H 142 cm x 86 cm x 66 cm
Weight:	5 lbs. / 2.25 kg

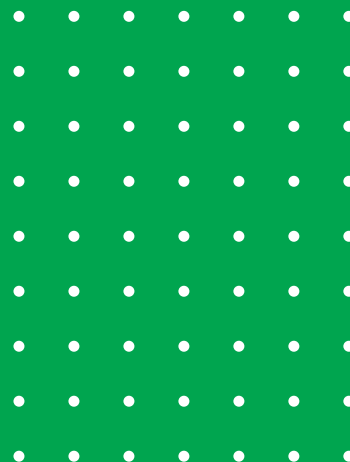

MINI-RACKER™

Product No.: 6010-YE
Dimensions: 31" L x 29" W x 15" H
124 cm x 133 cm x 57 cm
Weight: 12.5 lbs. / 454 kg
Load Bearing
Capacity UDL: 200 lbs. / 1350 kg
Sump Capacity: 8 gal. / 387.6 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

MINI-RACKER™ MOBILE UNIT

Product No.: 6011-YE-M
Dimensions: 31" L x 29" W x 15.75" H
124 cm x 133 cm x 57 cm
Weight: 15 lbs. / 454 kg
Load Bearing
Capacity UDL: 200 lbs. / 1350 kg
Sump Capacity: 8 gal. / 387.6 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

MINI-STACKER™

Product No.: 6012-YE
Dimensions: 31.5" L x 19.5" W x 18" H
124 cm x 133 cm x 57 cm
Weight: 10 lbs. / 454 kg
Load Bearing
Capacity UDL: 100 lbs. / 1350 kg

THE MINI-RACKER™ SYSTEM

THE MOST EFFICIENT DISPENSING/STORAGE SYSTEM YOU CAN BUY!

The NEW Mini Racker-Stacker™ System is ideal for storage and dispensing of small containers with built-in spill protection and patented enclosed sump. The system has a mobility option to make movement in the plant environment safe and easy too. The Mini Racker-Stacker™ System helps save liquids that are routinely lost during the dispensing process and helps protect worker safety by keeping the dispensing area neat and clean.

The Mini Racker Stacker™ System consists of the base Racker that will hold two (2) 5-6.5 US gallon metal or plastic lidded pails or cans, or two (2) 5 US gallon or smaller metal or plastic "jerry cans". The Racker module is available in two (2) versions: a "place and use" version (6010-YE) and a mobile version (6011-YE-M) that includes wheels and handle. The Stacker module can be used in conjunction with the Racker to add an extra level of storage, or separately with another containment solution to mix-and-match the user's specific need.



Handle flips up on the Mobile Unit for compact storage.

PATENTED
ENCLOSED
SUMP



Its wheels and handle make the Mini Racker-Stacker™ Mobile Unit portable throughout the plant. It easily fits through standard doorway openings.



Made of highly durable and chemically compatible polyethylene, AZTEC's Mini Racker-Stacker™ System is equipped with patented enclosed sump so that spills are truly portable, and the user isn't "stuck" when a spill occurs like with other larger competitive products.



Shown with optional workstation.

For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact



Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

THE POLY-RACK™ SYSTEM

THE MOST EFFICIENT DISPENSING/STORAGE SYSTEM YOU CAN BUY!

POLY-RACKER™

The centerpiece of the Poly-Rack System is the Poly-Racker, a unique one-piece polyethylene rack that holds two 55-gallon drums securely in place. A massive 100-plus gallon containment sump ensures spill safety even in worst-case drum leaks. The deep dispensing well easily holds 5-gallon pails while containing incidental spills and splashes in a ribbed bottom without contaminating the sump. Dispensing wells have a scalloped edge so pails can be easily removed. Two (2) drain plugs are standard. Poly-Rackers can be transported by forklift as separate pieces.

POLY-STACKER™

Combine a single Poly-Stacker with a Poly-Racker to stack up to four drums. Add another Poly-Stacker and you have a storage system that holds six drums and is rated to hold 3,000 lbs UDL.

Each Poly-Stacker holds two 55-gallon drums and can quickly be stacked with a forklift. Any spills from the second and third levels fall into the dispensing well for containment and easy clean-up. Combined, Poly-Racker and Poly-Stacker make up the most efficient drum storage and dispensing system you can buy.



POLY-SHELF™

Save money - prevent spills!
Increase safety and productivity when you add the Poly-Shelf to your Poly-Rack System.

It easily attaches to a Poly-Stacker and allows simultaneous dispensing from all drums. Spills? A hole in the bottom of the Poly-Shelf drains into the dispensing well in the Poly-Racker.

Note: Do not use plastic drums at load bearing levels.

PATENTED
ENCLOSED
SUMP

SPECIFICATIONS

POLY-RACKER™

Product No.: 6000-YE
Dimensions: 49" L x 52.5" W x 22.5" H
124 cm x 133 cm x 57 cm
Weight: 120 lbs. / 454 kg
Load Bearing
Capacity UDL: 3000 lbs. / 1350 kg
Sump Capacity: 102 gal. / 387.6 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

POLY-STACKER™

Product No.: 6002-YE
Dimensions: 49" L x 41" W x 13" H
124 cm x 104 cm x 33 cm
Weight: 56 lbs. / 25.2 kg
Load Bearing
Capacity UDL: 2400 lbs. / 1080 kg

POLY-SHELF™

Product No.: 6003-YE
Dimensions: 17" L x 22" W x 17.5" H
43 cm x 56 cm x 44 cm
Weight: 10 lbs. / 4.5 kg
Load Bearing
Capacity UDL: 60 lbs. / 27 kg



SINGLE POLY-RACKER™

Product No.: 6006-YE
Dimensions: 31" L x 53" W x 32" H
79 cm x 39 cm x 6 cm
Weight: 95 lbs. / 42.75 kg
Load Bearing
Capacity UDL: 1600 lbs. / 720 kg
Sump Capacity: 66 gal. / 250.8 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

SINGLE POLY-STACKER™

Product No.: 6007-YE
Dimensions: 31" L x 40.5" W x 20" H
79 cm x 103 cm x 51 cm
Weight: 50 lbs. / 22.5 kg
Load Bearing
Capacity UDL: 800 lbs. / 360 kg

MULTI-PURPOSE RACKER/STACKER™

Product No.: 6004-YE
Dimensions: 48.5" L x 41" W x 20" H
123 cm x 104 cm x 51 cm
Weight: 87 lbs. / 39.15 kg
Load Bearing
Capacity UDL: 2400 lbs. / 1080 kg
Regulations*: EPA 40 CFR 264.175

*EPA compliant when used in conjunction with product # 5400


UNIVERSAL™ WELL LINER

Product No.: 6005-BK
Dimensions: 12.75" L x 15.5" W x 2.5" H
32 cm x 39 cm x 6 cm
Weight: 1 lb. / .45 kg
Load Bearing
Sump Capacity: 0.5 gal. / 11.9 liters


LOADING IS EASY AS 1-2-3!



1
Secure drum with proper cinch strap and lift drum with forklift.



2
Guide drum and orient onto the Poly-Racker.



3
Once drum is placed securely on the Poly-Racker, remove cinch strap and back away.



PATENTED
ENCLOSED
SUMP

3/4" spout recommended



SINGLE POLY-RACK™ SYSTEM

Economical, space-saving solution to storing and dispensing from 55-gallon drums. The system consists of separate single Poly-Racker, single Poly-Stacker, Universal Well Liner and Poly Shelf. The Poly Stacker allows for stacking of a second 55-gallon drum. The system holds 1,600 lbs and the Poly-Racker features a 66-gallon sump capacity!



MULTI-PURPOSE RACKER/STACKER™

Maximize floor space with the Multi-Purpose Racker/Stacker. One Multi-Purpose Racker/Stacker holds up to two 55-gallon drums. The stackable unit allows you to store up to four 55-gallon drums. The Racker-Stacker can be placed on the floor (no sump) or on the Poly-Slim Line 6000 pallet (Product No. 5400-YE see page 20). Use with the Poly-Shelf (Product No. 6003-YE as seen above) for easy dispensing into 5 or 6-gallon pails. Forkliftable!

*EPA compliant when used in conjunction with product # 5400

UNIVERSAL™ WELL LINER

The Universal Well Liner provides extra spill protection.



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

POLY-SPILLCART®

GET ON THE MOVE!

Transporting 55-gallon drums, 5-gallon pails, paint cans and other materials around your plant has never been easier. Poly-Spillcart eliminates the risk of spills during transport with its 57-gallon sump capacity.

Poly-Spillcart's caster wheels let you move around freely, while its ergonomically-designed handle makes maneuvering a breeze. A tray for tool storage keeps tools clean and handy. The structural foam grate removes for easy cleaning and a drain plug lets you drain the sump without effort.



POLY-SPILLCART™ ATC

Need an even more rugged spill cart for outdoor terrain? Poly-Spillcart is available as an All-Terrain Cart or can be converted into one with our conversion kit. The Poly-Spillcart ATC's heavy-duty pneumatic rubber wheels and durable axle are designed to handle smoothly...even in the most demanding environments. Wheel brakes are not available with this model.



Rear casters pivot 360° to let you move around freely; each with wheel brakes for securing position.



Drain plug lets you empty sump easily.



Large internal sump holds incidental spills.



Built-in tool tray keeps tools and other small objects clean and handy.

SPECIFICATIONS

POLY-SPILLCART®

Product No.: 5200-YE
 Dimensions:
 (w/ handle) 66.5" L x 29" W x 43.88" H
 169 cm x 74 cm x 112 cm
 (w/o handle) 66.5" L x 29" W x 16" H
 169 cm x 74 cm x 41 cm
 Weight:
 101 lbs. / 46 kg
 Load Bearing
 Capacity UDL: 500 lbs. / 225 kg
 Sump Capacity: 57 gal. / 216 liters
 Regulations: EPA 40 CFR 264.175, SPCC and NPDES

POLY-SPILLCART® ATC

Product No.: 5200-YE-A
 Dimensions:
 (w/ handle) 66.5" L x 29" W x 43.88" H
 169 cm x 74 cm x 112 cm
 (w/o handle) 66.5" L x 29" W x 16" H
 169 cm x 74 cm x 41 cm
 Weight:
 106 lbs. / 48 kg
 Load Bearing
 Capacity UDL: 500 lbs. / 225 kg
 Sump Capacity: 57 gal. / 216 liters
 Regulations: EPA 40 CFR 264.175, SPCC and NPDES



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
 Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

SPILL SCOOTER™

Product No.: 5205-YE
Dimensions:
Exterior: 34" dia. x 8.82" H
88 cm x 23 cm
Interior: 26" dia. x 6" H
66 cm x 15 cm
Weight: 22.5 lbs. / 41.4 kg
Load Bearing
Capacity UDL: 500 lbs. / 225 kg
Sump Capacity: 11 gal. / 41.8 liters
Regulations: EPA, SPCC and NPDES

SPILL SCOOTER™ HANDLE

Product No.: 5206-BK
Dimensions: 36.62" L x 10" W
93 cm x 25 cm
Weight: 3.7 lbs. / 1.67 kg

DRUMS-UP™

Product No.: 8091-YE
Height: 7.25" / 18 cm
Diameter: 34" / 86 cm
Weight: 12 lbs. / 5.4 kg
Sump Capacity: 19.5 gal. / 74.1 liters
Regulations: EPA, SPCC and NPDES

DRUMS-UP JR.™

Product No.: 8200-YE
Height: 7.5" / 19 cm
Diameter: 34" / 86 cm
Weight: 4 lbs. / 1.8 kg
Sump Capacity: 7.5 gal. / 28.5 liters
Regulations: EPA, SPCC and NPDES

POLY-TANK CONTAINMENT UNIT/275™

Product No.: 5275-BK
Dimensions: 82.25" L x 45" W x 35.75" H
209 cm x 114 cm x 90 cm
Interior Dimension: 65" L x 27" W
166 cm x 44.1 cm
Weight: 98 lbs. / 41.4 kg
Sump Capacity: 275 gal. / 1045 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

BULKHEAD FITTING

Product No.: 5276
Dimensions/O.D.: 3" / 8 cm
Dimensions/I.D.: .75" / 2 cm
Weight: 4 lbs. / 1.8 kg

SPILL SCOOTER™

THE ORIGINAL MOBILE DISPENSING SCOOTER.

Dispensing drums while transporting them around the plant is no longer a problem thanks to our Spill Scooter. The Spill Scooter provides secondary containment for incidental spills and drips which often occur during vertical dispensing applications.

Incidental spills and drips are contained in the well, with a spout for easy draining. The Spill Scooter fits all drums up to 55 gallons. Made of 100% polyethylene, the Spill Scooter will not rust or corrode.



Built-in bung fitting holder



Optional metal T-Handle (product no. 5206-BK) available.



DRUMS-UP™

THE INCIDENTAL SPILL SOLUTION.

Need temporary protection against incidental barrel spills? Our Drums-Up and Drums-Up Jr. let you control nuisance spills from drums sized up to 55 gallons. A 19.5-gallon sump capacity catches liquid before it reaches your floor, reducing the risk of slip and fall injuries.

Ideal for use as a drum pumping station.

DRUMS-UP JR.™

Inexpensive containment for 16-gallon drums and 5-gallon pails.



POLY-TANK CONTAINMENT UNIT/275™

Designed for the widely used 275-gallon obround tank, the Poly-Tank Containment Unit/275 will help you protect against hazardous and costly spills. It boasts a large

275-gallon sump which saves space and provides easy access to the tank and pumps.

The Poly-Tank Containment Unit/275 prevents harmful oil spills from contaminating your yard. Optional bulkhead fitting makes pumping and draining simple (Product No. 5276). Tarp also available (Product No. 5277-GY).



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

HAZARD HUT®

THE SOLUTION TO YOUR INDOOR STORAGE PROBLEM IS OUTDOOR CONTAINMENT.

When floor space is at a premium indoors, take your hazardous materials outdoors with the Hazard Hut. One-piece molded 100% polyethylene construction means there are no joints or seams to leak. Molded-in side vents reduce fumes, while



Door opening 41.5" W x 48.5" H

UV protection makes it a durable performer outside. Removable grates make it easy to clean and the 72-gallon sump capacity ensures leak and spill containment.

Security is no problem. The big double doors provide easy access for up to four 55-gallon drums while their double-wall construction and heavy-duty hinges and lock latches keep contents secure. Four-way forkliftable design makes the Hazard Hut easy to handle.

Massive sump has removable structural foam grates for easy cleaning.



HAZARD HUT® POLY-RAMP

Loading the Hazard Hut is easy with our Hazard Hut Poly-Ramp. With 5" polyolefin wheels, you just roll Poly-Ramp up and start rolling barrels in.

Hazard Hut Poly-Ramp features:

- Integrally-molded handles
- 10 slope allows for easy loading
- Improved ribbed, non-skid surface
- 100% polyethylene

SPECIFICATIONS

HAZARD HUT®

Product No.:	4000-YE
Dimensions:	
Exterior:	63.38" L x 67" W x 71.38" H 161 cm x 170 cm x 181 cm
Interior:	53.75" L x 53.75" W x 52.25" H 136 cm x 136 cm x 132 cm
Weight:	255 lbs. / 114.75 kg
Load Bearing	
Capacity UDL:	4000 lbs. / 1800 kg
Sump Capacity:	72 gal. / 273.6 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

HAZARD HUT® POLY-RAMP

Product No.:	4001-BK
Dimensions:	115" L x 31.13" W x 16.62" H 292 cm x 79 cm x 42 cm
Weight:	155 lbs. / 69.75 kg
Load Bearing	
Capacity UDL:	1000 lbs. / 450 kg

POLY-SAFETYPACK® PLUS

Product No.:	2077-YE
	2077-YE-D (w/drain)
Dimensions:	
Exterior:	60.5" L x 36.5" W x 63.25" H 154 cm x 93 cm x 161 cm
Interior:	51.25" L x 26.25" W x 54.25" H 130 cm x 66 cm x 138 cm
Weight:	140 lbs. / 63.63 kg
Load Bearing	
Capacity UDL:	1200 lbs. / 544.32 kg
Sump Capacity:	270 gal. / 1026 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

POLY-SAFETYPACK® PLUS

TALLER FOR SECURE PUMPING STATIONS.

Poly-Safetypack Plus provides the same results as the Poly-Safetypack, with one key advantage...the 54.25" inside height of the Poly-Safetypack Plus allows the lids to be closed with the pumps in place to create a versatile pumping station where the convenience of leaving the pumps installed is important. Capacity is also greater, 270 gallons. Optional drain.



ALLOWS
PUMPS
TO STAY IN
PLACE



POLY-SAFETYPACK®

Product No.:	2038-YE 2038-YE-D (w/drain)
Dimensions:	
Exterior:	60.25" L x 36.5" W x 45.75" H 153 cm x 93 cm x 116 cm
Interior:	52.37" L x 26.25" W x 37" H 133 cm x 67 cm x 94 cm
Weight:	115 lbs. / 52.3 kg
Load Bearing	
Capacity UDL:	1200 lbs. / 544.32 kg
Sump Capacity:	135 gal. / 513 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

LARGE TOTES

Product No.:	1505-YE
Dimensions:	
Exterior:	45" L x 35.62" W x 30.37" H 114 cm x 90 cm x 77 cm
Interior:	34" L x 25" W x 24.25" H 86 cm x 63 cm x 61 cm
Weight:	48 lbs. / 21.77 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	123 gal. / 467.4 liters

EXTRA LARGE TOTES

Product No.:	1525-YE
Dimensions:	
Exterior:	51.62" L x 47.5" W x 32.5" H 131 cm x 120 cm x 82 cm
Interior:	41" L x 37" W x 26.75" H 104 cm x 94 cm x 68 cm
Weight:	76 lbs. / 34.47 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	223 gal. / 847.4 liters

LARGE COMBO 4" WHEELS

Product No.:	1510-YE
Dimensions:	
Exterior:	45" L x 35.5" W x 36" H 114 cm x 90 cm x 91 cm
Weight:	55.5 lbs. / 25.17 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	123 gal. / 465.6 liters

LARGE COMBO 8" WHEELS

Product No.:	1511-YE
Dimensions:	
Exterior:	45" L x 35.5" W x 40" H 114 cm x 90 cm x 102 cm
Weight:	76 lbs. / 34.47 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	123 gal. / 465.6 liters

EXTRA LARGE COMBO 4" WHEELS

Product No.:	1530-YE
Dimensions:	
Exterior:	51.5" L x 47.5" W x 37.5" H 131 cm x 121 cm x 95 cm
Weight:	83.5 lbs. / 34.47 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	223 gal. / 844.2 liters

EXTRA LARGE COMBO 8" WHEELS

Product No.:	1531-YE
Dimensions:	
Exterior:	51.5" L x 47.5" W x 41.5" H 131 cm x 121 cm x 105 cm
Weight:	104 lbs. / 47.17 kg
Load Bearing	
Capacity UDL:	500 lbs. / 226.8 kg
Sump Capacity:	223 gal. / 844.2 liters

POLY-SAFETYPACK®

SAFE, SECURE TWO-DRUM STORAGE.

This tough, indoor or outdoor performer protects two 55-gallon drums while containing leaks with a 135-gallon sump capacity. Drum access and removal is easy with our unique gull-wing covers. Items inside are protected from the weather with our unique slide-over lid design.

Security locks are included to secure the covers and contents. 100% polyethylene has excellent resistance to chemicals as well as weather. Translucent sidewalls allow for an immediate view of liquids so you don't need to open the lids to see if there's been a leak.

The Poly-Safetypack is easily handled by forklift or pallet jack from two sides. Optional drain.



LARGE TOTES & EXTRA LARGE TOTES

AZTEC Totes are the only stackable, nestable, forkliftable, water resistant, mobile totes on the market. These units are available in two sizes, large and extra-large, and both offer a 500 lb. load bearing capacity.

Combo includes lid w/handles and 4" polyurethane wheels (product no. 1515) or 8" solid rubber wheels (product no. 1535).



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



JOB HUT™

OUTDOOR STORAGE HAS NEVER BEEN SO PRACTICAL...OR SO AFFORDABLE!

If easy access, cost efficiency and a large storage area are what you need, Job Hut is the answer.

An extra large storage area lets you store up to eight 55-gallon drums right on their pallets! Its low profile design allows for easy access. And it's forkliftable from all sides for effortless handling.

Tough polyethylene construction means it won't rust or corrode, while UV inhibitors make it extra durable for outdoor use. A large 75-gallon sump capacity eliminates the risk of spills or leaks, and structural foam grates remove for easy cleaning. What's more, molded-in vents reduce fumes and condensation inside, while heavy-duty hinges and lock keep contents secure.

The Job Hut offers substantial savings when compared to similar metal or concrete storage buildings, while providing superior performance. The optional ramp facilitates loading your drums into the unit. Safe, secure, and cost-effective.



100% polyethylene with UV inhibitors for increased durability

Three removable structural foam grates hold 8,000 lbs UDL weight

Low profile design allows for easy access. Extra-wide 56" x 78" doorway allows for easy forklift entry.

4-way forkliftable design for ease in handling

Two heavy-duty, double-walled doors for added security

Built-in 75-gallon sump capacity



Structural foam grates



Tie-down feature


remove for easy cleaning. for secure anchorage.

MULTI-PURPOSE WORK RAMP

LOAD 'EM UP!

Make loading drums a cinch with the Multi-Purpose Work Ramp. Lightweight and easy to handle, it attaches to the Job Hut in seconds.

Improved non-skid surface eliminates risk of slipping. Features a 10° slope for easy loading.

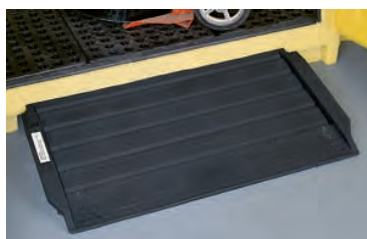

SPECIFICATIONS

JOB HUT™

Product No.:	4010-YE
Dimensions:	
Exterior:	90" L x 62.5" W x 93" H 228 cm x 159 cm x 236 cm
Interior:	70" L x 51" W x 82" H 178 cm x 129 cm x 208 cm
Weight:	512 lbs. / 230.4 kg
Load Bearing	
Capacity UDL:	8000 lbs. / 1800 kg
Sump Capacity:	72 gal. / 285 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

MULTI-PURPOSE WORK RAMP

Product No.:	5111-BK
Dimensions:	25.5" L x 48" W x 6.25" H 65 cm x 122 cm x 16 cm
Weight:	30 lbs. / 69.75 kg
Load Bearing	
Capacity UDL:	1000 lbs. / 450 kg



POLY-COLLECTOR™ 66

Product No.: 8001-YE (w/steel drum)
8002-YE (w/poly drum)

Dimensions:

Top Diameter: Exterior - 32.5" / 82 cm
Interior - 27.13" / 69 cm
Bottom Diameter: Exterior - 26.38" / 67 cm
Interior - 25.75" / 65 cm
Height: Ext/steel inner: 42" / 107 cm
Int/steel inner: 29.25" / 74 cm
Ext/poly inner: 42.5" / 108 cm
Int/poly inner: 29.25" / 74 cm
Weight: Steel inner: 92 lbs. / 41.4 kg
Poly inner: 78 lbs. / 35.1 kg

Load Bearing

Capacity UDL: 600 lbs. / 270 kg
Sump Capacity: 66 gal. / 251 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

POLY-COLLECTOR™ 66 (SHELL ONLY)

Product No.: 8075-YE

Dimensions:

Top Diameter: Exterior - 32.5" / 82 cm
Interior - 27.13" / 69 cm
Bottom Diameter: Exterior - 26.38" / 67 cm
Interior - 25.75" / 65 cm
Weight: 29.5 lbs. / 13.27 kg

Load Bearing

Capacity UDL: 600 lbs. / 270 kg
Sump Capacity: 70 gal. / 266 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

POLY-COLLECTOR™ 110

Product No.: 8080-YE (w/poly drum)
8081-YE (w/steel drum)

Dimensions:

Top Diameter: Exterior - 31.75" / 81 cm
Interior - 27.25" / 62 cm
Bottom Diameter: Exterior - 25.75" / 65 cm
Interior - 24.75" / 62 cm
Height: Ext/steel inner: 49" / 124 cm
Int/steel inner: 41.25" / 104 cm
Ext/poly inner: 49" / 124 cm
Int/poly inner: 41.25" / 105 cm
Weight: Steel inner: 111.5 lbs. / 50.18 kg
Poly inner: 97.5 lbs. / 43.88 kg

Load Bearing

Capacity UDL: 600 lbs. / 270 kg
Sump Capacity: 105 gal. / 380 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

DRUM DOLLY

Product No.: 8050-BU

Dimensions:

Top Diameter: Exterior - 27.5" / 70 cm
Interior - 27.125" / 69 cm
Bottom Diameter: NA
NA
Height: Exterior - 5.5" / 14 cm
Interior - 1.56" / 4 cm
Weight: 17.5 lbs. / 7.87 kg

* Where applicable, height listed w/casters
and funnel assembled

GET YOUR WASTE COLLECTION ON THE MOVE.

The Poly-Collector™ Portable Hazardous Materials Collection Systems put mobility into containment so you can go where the waste is. These caster-mounted containers are built tough from UV-stabilized polyethylene for excellent chemical resistance to a broad range of industrial materials.

Both models are equipped with the unique Poly Drum Funnel™ 55 to prevent over-spills while allowing multiple oil filters, pails, and cans to drain at once. Both products are ideal for collecting waste oil, antifreeze and chemicals. The Poly-Collector 110 outer shell holds 105 gallons, with an inner drum that holds 55 gallons. A twist-on lid ensures safe and easy closure. The Poly-Collector 66 poly outer shell holds 66 gallons while the inner drum holds 55 gallons.



POLY-COLLECTOR™ 66 THE INDOOR SYSTEM.

Universal Poly-Drum Funnel™
(Product No. 3004-YE, pg. 32)

Inner drum holds 55 gallons

Poly outer shell holds 66 gallons
(Product No. 8075-YE)

Drum Dolly
(Product No. 8050-BU)

Items inside POLY-COLLECTOR™ 110
are elevated to show better detail.

POLY-COLLECTOR™ 110 THE OUTDOOR SYSTEM.

Universal Poly-Drum Funnel™
(Product No. 3004-YE, pg. 32)

Inner drum holds 55 gallons

Poly outer shell holds 105 gallons
(Product No. 1240-YE, pg. 5)

Twist-down lid for
safe and easy closure

Drum Dolly
(Product No. 8050-BU)



For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact



Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

IBC 2000i™

INTERMEDIATE BULK CONTAINMENT MADE EASY.

AZTEC Corporation's integrated IBC 2000i gives intermediate bulk container users more versatile spill containment. It fits more than 99% of all IBC dispensing units and features a large sump capacity of 385 gallons, exceeding EPA 40 CFR 264.175 regulations. The unit also comes with an integrated 5-gallon pail holder for quick and easy dispensing.

The IBC 2000i is the only one-piece, lightweight, 100% polyethylene IBC spill containment unit that is forkliftable and nestable for convenient shipment and storage, and reduces shipping costs. The polyethylene construction will not rust or corrode or have adverse reactions with chemicals. An optional drain is available.




Typical installation for IBC tank

SPECIFICATIONS

IBC 2000i™

Product No:	5469-YE, 5469 YE-D (w/drain)
Exterior Dimensions:	72" L x 80" W x 29" H 182.88 cm x 203.20 cm x 73.66 cm
Pedestal Dimensions:	55" L x 55.5" W x 29" H 139.70 cm x 140.97 cm x 76.66 cm
Weight:	308 lbs. / 678 kg
Sump Capacity:	385 gal. / 1457.45 liters
Max. Load Rating	8,000 lbs. UDL
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

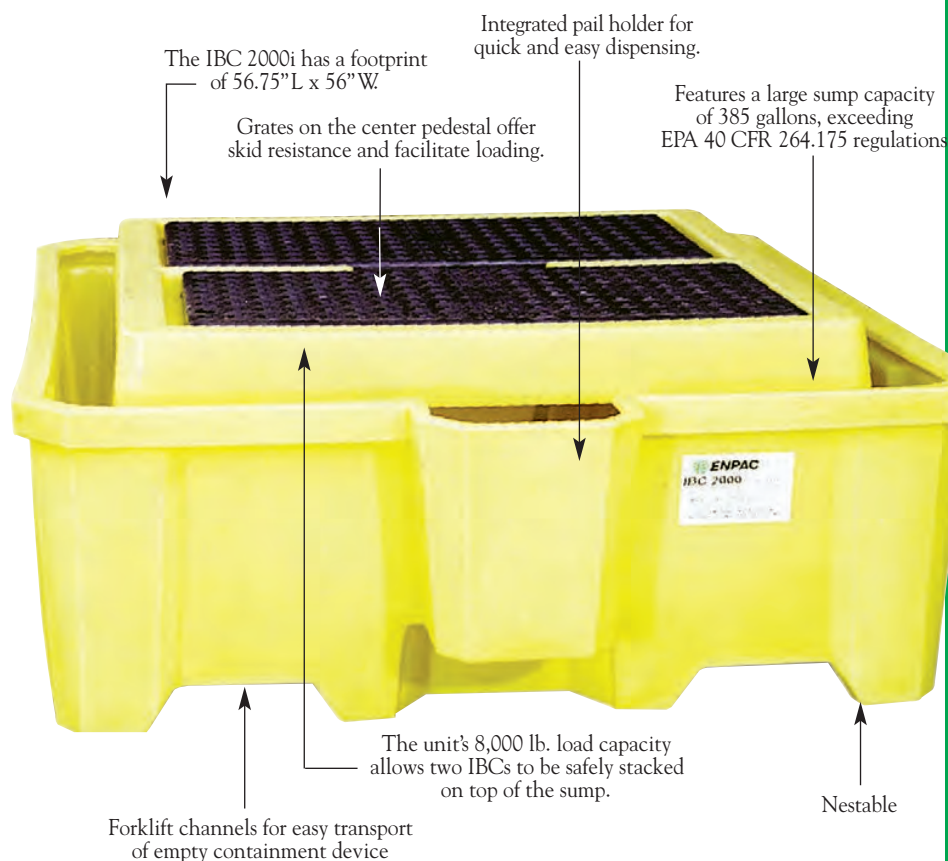

2-DRUM HARDCOVER

Product No.: 4062-YE
 Dimensions:
 Exterior: 60" L x 36" W x 72" H
 152 cm x 94 cm x 183 cm
 Interior: 50" L x 29" W x 51" H
 127 cm x 74 cm x 130 cm
 Weight: 210 lbs. / 95.5 kg
 Load Bearing
 Capacity UDL: 2000 lbs. / 900 kg
 Sump Capacity: 58 gal. / 220.4 liters
 Regulations: EPA 40 CFR 264.175, SPCC and NPDES

4-DRUM HARDCOVER

Product No.: 4064-YE
 Dimensions:
 Exterior: 65" L x 58" W x 69" H
 165 cm x 147 cm x 175 cm
 Interior: 49" L x 54" W x 53.5" H
 124 cm x 137 cm x 135 cm
 Weight: 269 lbs. / 122.3 kg
 Load Bearing
 Capacity UDL: 6000 lbs. / 2700 kg
 Sump Capacity: 66 gal. / 250.8 liters
 Regulations: EPA 40 CFR 264.175, SPCC and NPDES

RAMP EXTENDER

Product No.: 5038-BK
 Dimensions: 29.5" L x 8.5" W x 5.5" H
 75 cm x 22 cm x 16 cm
 Weight: 6 lbs. / 2.7 kg
 Load Bearing
 Capacity UDL: 1000 lbs. / 450 kg

POLY-RAMP

Product No.: 5039-BK
 Dimensions: 67" L x 30.5" W x 12.75" H
 170 cm x 77 cm x 32 cm
 Weight: 65 lbs. / 29.25 kg
 Load Bearing
 Capacity UDL: 1000 lbs. / 450 kg

TARPS

Contact AZTEC for more information.



2-DRUM HARDCOVER & SPILLPALLET

Ideal for indoor/outdoor storage of up to two 55-gallon drums. Roll-top design allows for use in limited space or next to buildings where swing-open doors would be a problem. Top or front/rear loadable. Lockable door! Used in conjunction with Poly-Spillpallet™ 2000 (Product No. 5253-YE, pg. 20). Optional ramp and drain. Shipped knocked down only.

4-DRUM HARDCOVER & SPILLPALLET

SHOWN WITH OPTIONAL RAMP

A sturdy solution to indoor/outdoor storage of up to four 55-gallon drums. Weatherproof! Roll-top design allows it to be used in limited space or next to buildings where swing-open doors would be a problem. Takes up less than 25 square feet of floor space. Allows ample room for drum pumps. Used in conjunction with Poly-Slim-Line™ 6000 (Product No. 5400-YE, pg. 20). Optional drain. Shipped knocked down only.



POLY-RAMP™

WALK UP TO REAL VALUE.

Get big performance at a great price with our Poly Ramp. The ribbed non-skid surface allows for safe walk-ups. Holds up to 1,000 lbs. of UDL weight.

- 100% polyethylene construction
- 10° ramp slope
- Ribbed, non-skid surface for safe walking, Poly-Ramp can be used with Product No. 5102-CG and 5400-YE.



RAMP EXTENDER

Works with the AZTEC Poly-Ramp to accommodate 17" high pallets and AZTEC 2-Drum Hardcover. No more relying on expensive and obtrusive metal ramps. Simply retrofit your existing ENPAC Poly-Ramp (Product No. 5039-CG) with our new Ramp Extender.

TARPS

Product No. 5061-YE: for use with 5400-YE.
 Product No. 5062-YE: for use with 5102-YE.
 Product No. 5063-YE: for use with 5253-YE.
 Product No. 5064-YE: for use with 5001-YE.
 Product No. 5066-YE: for use with 5469-YE.



Specifications not listed, call for more information.



For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact
 Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



TOUGH JOB POLY-SPILLPALLET™ 2000

This secondary containment system is engineered to meet the rigors of today's regulatory environment. With 100% polyethylene, it provides excellent chemical resistance. Drain hole with plug available.

- Meets EPA 40 CFR 264.175
- Holds up to 2,000 lbs UDL
- Forkliftable
- Removable grates for easy cleaning

Optional tarp available (Product No. 5063-YE, p. 19).

LOW-PROFILE IN-LINE POLY-SPILLPALLET™ 3000

WHERE NO DRUM STORAGE HAS GONE BEFORE.

Storing drums in-line near the wall, between columns, and in all those spaces you thought were unusable. Optional drain.

- Holds four 55-gallon drums
- Low 12" profile
- Holds up to 3,000 lbs UDL wt.
- Raised edge on back and sides helps orient barrels on pallet
- Non-skid, removable grates
- 66-gallon sump capacity meets EPA 40 CFR 264.175
- 100% polyethylene



Optional tarp available
(Product No. 5062-YE, p. 19).



POLY-SLIM-LINE™ 6000

SLIM IS IN.

Poly-Slim-Line 6000 offers all of the same advantages as our Poly-SpillPallet 6000... and more! This addition to our pallet family features a low, 12" profile and a UDL load bearing capacity of 6000 lbs. Optional drain.

Optional tarp available (Product No. 5061-YE, p. 19).

POLY-SPILLPALLET™ 6000

DESIGNED TO HOLD THE HEAVY LOAD.

Rated at 6,000 lbs. UDL weight with a 83-gallon sump capacity that meets EPA 40 CFR 264.175. Square 50" x 50" footprint saves space yet easily holds four 55-gallon drums. Includes the same rugged features as the 2000. Optional drain.

- Two removable grates
- Forkliftable from all sides



Optional tarp available (Product No. 5064-YE, p. 19).

SPECIFICATIONS

POLY-SPILLPALLET™ 2000

Product No.:	5253-YE
	5253-YE-D (w/drain)
Dimensions:	53.5" L x 29" W x 17" H
	136 cm x 74 cm x 43 cm
Weight:	63 lbs. / 28.35 kg
Load Bearing	
Capacity UDL:	2000 lbs. / 900 kg
Sump Capacity:	58 gal. / 220.4 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

INLINE POLY-SPILLPALLET™ 3000

Product No.:	5102-YE
	5102-YE-D (w/drain)
Dimensions:	98" L x 25.25" W x 12" H
	249 cm x 64 cm x 30 cm
Weight:	80 lbs. / 36 kg
Load Bearing	
Capacity UDL:	3000 lbs. / 1350 kg
Sump Capacity:	66 gal. / 250.8 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

POLY-SLIM-LINE™ 6000

Product No.:	5400-YE
	5400-YE-D (w/drain)
Dimensions:	54" L x 54" W x 12" H
	137 cm x 137 cm x 43 cm
Weight:	91 lbs. / 41 kg
Load Bearing	
Capacity UDL:	6000 lbs. / 2700 kg
Sump Capacity:	66 gal. / 250.8 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

POLY-SPILLPALLET™ 6000

Product No.:	5001-YE
	5001-YE-D (w/drain)
Dimensions:	50" L x 50" W x 17" H
	127 cm x 127 cm x 43 cm
Weight:	88 lbs. / 315.4 kg
Load Bearing	
Capacity UDL:	6000 lbs. / 1350 kg
Sump Capacity:	83 gal. / 250.8 liters
Regulations:	EPA 40 CFR 264.175, SPCC and NPDES

8-DRUM WORKSTATION™

Product No.: 5110-YE
Dimensions: 100" L x 53.25" W x 6" H
254 cm x 135 cm x 15 cm
Weight: 139 lbs. / 62.55 kg
Load Bearing
Capacity UDL: 8000 lbs. / 1350 kg
Sump Capacity: 77 gal. / 292.6 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

6-DRUM WORKSTATION™

Product No.: 5115-YE
Dimensions: 76.5" L x 53" W x 6" H
194 cm x 135 cm x 15 cm
Weight: 104 lbs. / 47 kg
Load Bearing
Capacity UDL: 7000 lbs. / 3150 kg
Sump Capacity: 61 gal. / 231.8 liters
Regulations: EPA 40 CFR 264.175,
SPCC and NPDES

4-DRUM WORKSTATION™

Product No.: 5116-YE
Dimensions: 52.5" L x 53" W x 6" H
133 cm x 135 cm x 15 cm
Weight: 83 lbs. / 32.85 kg
Load Bearing
Capacity UDL: 6000 lbs. / 2700 kg
Sump Capacity: 43 gal. / 163.4 liters
Regulations: EPA, SPCC and NPDES

2-DRUM WORKSTATION™

Product No.: 5117-YE
Dimensions: 53" L x 28.5" W x 6" H
135 cm x 72 cm x 15 cm
Weight: 30 lbs. / 13.5 kg
Load Bearing
Capacity UDL: 2400 lbs. / 1080 kg
Sump Capacity: 22 gal. / 86.6 liters
Regulations: EPA, SPCC and NPDES

LINK-LOCK™

Product No.: 5112-BK (sold in pairs)
Dimensions: 9.6" L x 7.13" W x 3.5" H
24 cm x 18 cm x 9 cm
Weight: 1.5 lbs. each / 0.68 kg

GRATES

Product No.: 7006-BK
Dimensions: 48" L x 23" W x 1.175" H
122 cm x 58 cm x 4 cm
Weight: 17.5 lbs. / 7.87 kg

MULTI-PURPOSE WORK RAMP™

Product No.: 5111-BK
Dimensions: 25.5" L x 48" W x 6.25" H
65 cm x 122 cm x 16 cm
Weight: 30 lbs. / 13.5 kg
Load Bearing
Capacity UDL: 1000 lbs. / 900 kg

Note: Workstation units are not designed to be used with a forklift.

2, 4, 6 AND 8-DRUM WORKSTATIONS™

There's no need to worry about incidental spills on your factory floor. AZTEC's Workstations are the easiest to load with low profile design and optional ramp. Each Workstation is designed for stand alone use or combines with other Workstations for a customized work area.

- Tough, one-piece polyethylene construction, cannot rust or corrode
- Low-profile Workstations actually become part of your factory floor, optimizing space for increased safety and efficiency. Make drum loading a snap.
- Large sump capacity catches incidental spills
- Multi-Purpose Work Ramp hooks onto any Workstation for easy loading
- Heavy-duty removable structural foam grates for easy cleaning
- Our rolled-edge design helps resist cracking and warpage.

PRODUCTS SHOWN
INCLUDE 2, 4, 6 AND
8-DRUM WORKSTATIONS
& TWO MULTI-PURPOSE
WORK RAMPS WITH
THREE SETS
OF LINK-LOCKS.



LINK-LOCK™

SECURELY HOOKS MULTIPLE WORKSTATIONS TOGETHER.

Link and lock multiple Workstations together in a wide variety of configurations. Sold in pairs.

GRATES

New grates are available for when contamination occurs or for replacement. Call AZTEC customer service for details.



MULTI-PURPOSE WORK RAMP

MAKES YOUR JOB EVEN EASIER.

For easier loading, just hook the Multi-Purpose Work Ramp onto any of our Workstations. The work ramp is small enough to stay out of your way.

Note: Workstation units are not designed to be used with a forklift.



For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

DRIP SENTINEL™ DRUM TOP WORKSTATION™

PAYS FOR ITSELF WITH THE FIRST DRUM OF LIQUIDS DISPENSED!

The Drip Sentinel Drum-Top Workstation from AZTEC helps save liquids that are routinely lost during the dispensing process by catching and redirecting them to the drum fresh and free of debris.

NEW



Equipped with a stainless steel mesh strainer, spilled liquids flow back into the drum ready for use.

The Drip Sentinel Drum-Top Workstation is easy to install and use, fits 55-gallon steel tight-head drums, and works with all types of rotary drum pumps. Made of durable, non-corrosive and chemically resistant polyethylene, the Drip Sentinel Drum-Top Workstation helps to reduce waste removal costs and dangerous slip-and-fall incidents while saving time and money. The Drip Sentinel Drum-Top Workstation pays for itself in one use, by saving up to 4 gallons of liquid per drum.



DRIP SENTINEL™ DRIP PAD™

THIRSTY ABSORBENT PAD CAPTURES AND RETAINS UP TO 7 QUARTS OF SPILLED LIQUID.

The Drip Sentinel Drip Pad from AZTEC is a complete oil-select absorbent system ideal for a variety of uses such as oil changes and protection from leaky vehicles, lawn, farm and garden equipment.

Simply throw down the Drip Sentinel Drip Pad under leaky equipment and watch as it rapidly absorbs and retains up to 7 quarts of liquid (oils and hydrocarbons). The absorbent pads come in a non-slip barrier envelope that helps capture the spill. Dispose of in accordance with applicable regulations.

NEW

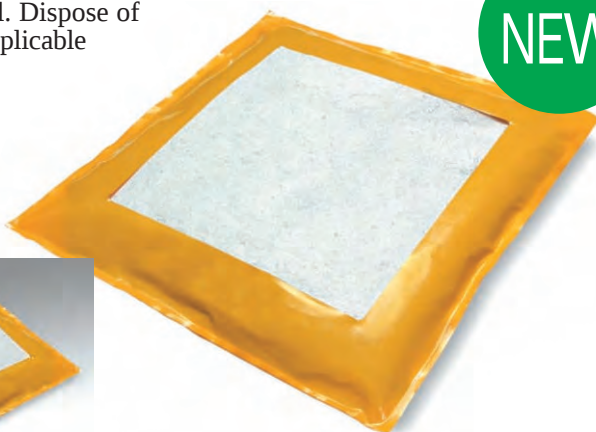

SPECIFICATIONS

DRIP SENTINEL™ DRUM TOP WORKSTATION™ 3200-BK

Dimensions: 24" OD x 20" ID
2.75" exterior height
2" interior height
Weight: 3 lbs.



Drum heads can become a mess when dispensing materials, wasting resources and spreading contaminants through the work area.



Drip Sentinel Drum Top Workstation saves material, returns it fresh to the dispensing drum, and keeps the drum head clean, helping to eliminate the spread of the mess.

DRIP SENTINEL™ DRIP PAD™ 5649-YE

Dimensions: 21" x 21"
Drip Catching Surface: 13.5" x 13.5"
Max. Capacity: 7 quarts
Weight: 2.5 lbs.
Bulk packaging: 25/box
12 boxes/pallet



Welded seams on the heavy duty polyethylene barrier help capture the spill and keep it from spreading.



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

DRIP SENTINEL™ HOSE WRAPS

4702-YE

Dimensions: Fits 1.5" - 3" hose
Weight: .5 lbs. / 227 g
Regulations: EPA, SPCC and NPDES

4704-YE

Dimensions: Fits 4" - 5" hose
Weight: .7 lbs. / 318 g
Regulations: EPA, SPCC and NPDES

4706-YE

Dimensions: Fits 6" - 8" hose
Weight: 1 lbs. / 454 g
Regulations: EPA, SPCC and NPDES

4710-YE

Dimensions: Fits 10" hose
Weight: 1.1 lbs. / 499 g
Regulations: EPA, SPCC and NPDES

DRIP SENTINEL™ MAINTENANCE BLANKETS

4720-BK

Dimensions: 15' L x 4' W x 120 mil
457 cm x 122 cm x .3 cm
Weight: 6 lbs. / 2.7 kg
Capacity: 6 gal. / 23 liters
Regulations: EPA, SPCC and NPDES

4725-BK

Dimensions: 12' L x 6' W x 120 mil
365 cm x 183 cm x .3 cm
Weight: 7 lbs. / 2.7 kg
Capacity: 7 gal. / 26.5 liters
Regulations: EPA, SPCC and NPDES

4730-BK

Dimensions: 10' L x 8' W x 120 mil
305 cm x 244 cm x .3 cm
Weight: 9 lbs. / 4 kg
Capacity: 8 gal. / 30 liters
Regulations: EPA, SPCC and NPDES

4735-BK

Dimensions: 10' L x 10' W x 120 mil
305 cm x 305 cm x .3 cm
Weight: 10 lbs. / 4.5 kg
Capacity: 9 gal. / 34 liters
Regulations: EPA, SPCC and NPDES

DRIP SENTINEL™ HOSE BIBB™

Product No.: 4701-YE
Size: .75" quick-disconnect fitting

Max. Opening: 2.5" / 6 cm
Absorption Capacity: 8 oz. / 237 ml
Holding Capacity: 1 pt. / 473 ml
Regulations: EPA, SPCC and NPDES

DRIP SENTINEL™ HOSE WRAP™

Does your industrial hose or fitting have a leak? Contain it and prevent costly leaks and spills that can cause injuries to your workers, with AZTEC's Hose Wrap. Made of rugged and chemically resistant material and an integrated sorbent pad, Hose Wrap will absorb leaks from hoses and fittings from 2" up to 10" in size. Four sizes to fit most applications, integrated sorbent pad absorbs hydrocarbons.



Pads are integrated and replaceable.

DRIP SENTINEL™ MAINTENANCE BLANKET™

The ENPAC Maintenance Blanket is designed to be utilized under vehicles or leaking equipment. The blanket is made of 8 oz. non-woven geo-textile material, that is 100 mils thick, backed by 1 layer of 20-mil fuel/chemical resistant polyethylene. The blanket provides a protective sorbent pad between the maintenance item and the placement area. The fabric backing provides an extra barrier that if not punctured stops any hydrocarbon from getting to ground. The blanket can be rolled or folded into a compact lightweight unit. It is an inexpensive alternative to heavier, more costly fabric mats.



DRIP SENTINEL™ HOSE BIBB™

Safely wrap quick-disconnect fittings or other hose attachment ends to absorb small leaks, when disconnecting hoses from industrial equipment. Integrated internal sorbent allows for containment up to 1 pint of Oil, Hydraulic, or other Hydrocarbons. Tether closure system holds the unit around the hose and fitting, unit made of rugged and chemically resistant material. Lightweight, high visibility yellow color.



For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

STINGER BERM™

THE WORLDWIDE LEADER IN LARGE, AGGRESSIVE AND IMMEDIATE SPILL RESPONSE

AZTEC's Stinger Berm leads the industry with its wide range of sizes and capacities for large-scale spill containment. Stinger Berms feature excellent rip, tear and puncture resistance for the most demanding application or terrain. Ground Pad and TrackMat provide additional protection.

- Easy to assemble snap-up design permits immediate response
- Compact storage and transport
- Air-lance tested containment welds for maximum product performance
- Lap joint welds for maximum strength
- Individual serial numbers
- CAD designed and cut components
- Fuel/chemical resistant containment area
- Custom sizes and special materials available



BERM ACCESSORIES

• GROUND PAD

Protect berms from truck wheels or rough terrain, ENPAC offers the super-tough Ground Pad - goes underneath the berm, directly on the ground, and prevents underside punctures from sharp objects.

• TRACMAT™

Placed inside the berm, allowing trucks to drive in and out while protecting the berm from punctures and tears. Available in sizes/dimensions to match any style Stinger Berm.

• STORAGE AND TRANSPORT BAG

Call for more information.



SPECIFICATIONS

4801-BK-SU

Dimensions: 4' L x 4' W x 8" H
1.22 m x 1.22 m x 20 cm
Weight: 11 lbs. / 5 kg
Sump Capacity: 79 gal. / 299 liters
Regulations: EPA, SPCC, NPDES

4802-BK-SU

Dimensions: 4' L x 4' W x 1' H
1.22 m x 1.22 m x 30 cm
Weight: 25 lbs. / 11 kg
Sump Capacity: 119 gal. / 450 liters
Regulations: EPA, SPCC, NPDES

4803-BK-SU

Dimensions: 4' L x 6' W x 8" H
1.22 m x 1.83 m x 20 cm
Weight: 18 lbs. / 8 kg
Sump Capacity: 119 gal. / 450 liters
Regulations: EPA, SPCC, NPDES

4804-BK-SU

Dimensions: 4' L x 6' W x 1' H
1.22 m x 1.83 m x 30 cm
Weight: 30 lbs. / 13.3 kg
Sump Capacity: 179 gal. / 677 liters
Regulations: EPA, SPCC, NPDES

4805-BK-SU

Dimensions: 4' L x 8' W x 8" H
1.22 m x 2.44 m x 20 cm
Weight: 21 lbs. / 9.5 kg
Sump Capacity: 159 gal. / 601 liters
Regulations: EPA, SPCC, NPDES

4806-BK-SU

Dimensions: 6' L x 6' W x 1' H
1.83 m x 1.83 m x 30.5 cm
Weight: 33 lbs. / 15.5 kg
Sump Capacity: 269 gal. / 1,018 liters
Regulations: EPA, SPCC, NPDES

4807-BK-SU

Dimensions: 8' L x 8' W x 8" H
2.44 m x 2.44 m x 20 cm
Weight: 35 lbs. / 16 kg
Sump Capacity: 319 gal. / 1,207 liters
Regulations: EPA, SPCC, NPDES

4810-BK-SU

Dimensions: 10' L x 10' W x 1' H
3.05 m x 3.05 m x 30 cm
Weight: 57 lbs. / 27.25 kg
Sump Capacity: 748 gal. / 2,831 liters
Regulations: EPA, SPCC, NPDES

4812-BK-SU

Dimensions: 12' L x 12' W x 1' H
3.65 m x 3.65 m x 30 cm
Weight: 80 lbs. / 36.3 kg
Sump Capacity: 1,077 gal. / 4,084 liters
Regulations: EPA, SPCC, NPDES

4816-BK-SU

Dimensions: 16' L x 16' W x 1' H
4.87 m x 4.87 m x 30 cm
Weight: 120 lbs. / 49 kg
Sump Capacity: 1,914 gal. / 7,245 liters
Regulations: EPA, SPCC, NPDES

4820-BK-SU

Dimensions: 10' L x 26' W x 1' H
3.05 m x 7.92 m x 30 cm
Weight: 122 lbs. / 53 kg
Sump Capacity: 1,944 gal. / 7,358 liters
Regulations: EPA, SPCC, NPDES

4836-BK-SU

Dimensions: 12' L x 36' W x 1' H
3.65 m x 10.97 m x 30 cm
Weight: 170 lbs. / 77 kg
Sump Capacity: 3,231 gal. / 12,230 liters
Regulations: EPA, SPCC, NPDES



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

4850-BK-SU

Dimensions: 15' L x 50' W x 1' H
4.57 m x 15.24 m x 30 cm
Weight: 259 lbs. / 113.5 kg
Sump Capacity: 5,610 gal. / 21,236 liters
Regulations: EPA, SPCC, NPDES

4854-BK-SU

Dimensions: 14' W x 54' L x 1' H
4.26 m x 16.45 m x 30 cm
Weight: 252 lbs. / 114.5 kg
Sump Capacity: 5,654 gal. / 21,402 liters
Regulations: EPA, SPCC, NPDES

4860-BK-SU

Dimensions: 12' L x 60' W x 1' H
3.65 m x 18.28 m x 30 cm
Weight: 225 lbs. / 102 kg
Sump Capacity: 5,385 gal. / 20,384 liters
Regulations: EPA, SPCC, NPDES

4866-BK-SU

Dimensions: 14' L x 66' W x 1' H
4.26 m x 20.11 m x 30 cm
Weight: 359 lbs. / 163 kg
Sump Capacity: 6,911 gal. / 26,160 liters
Regulations: EPA, SPCC, NPDES

4885-BK-SU

Dimensions: 14' L x 85' W x 1' H
4.26 m x 25.9 m x 30 cm
Weight: 420 lbs. / 190.5 kg
Sump Capacity: 8,901 gal. / 33,693 liters
Regulations: EPA, SPCC, NPDES

4820-BK-SF

Dimensions: 10' L x 26' W x 1' H
3.05 m x 7.92 m x 30 cm
Weight: 117 lbs. / 53 kg
Sump Capacity: 1,944 gal. / 7,358 liters
Regulations: EPA, SPCC, NPDES

4836-BK-SF

Dimensions: 12' L x 36' W x 1' H
3.65 m x 10.97 m x 30 cm
Weight: 170 lbs. / 77 kg
Sump Capacity: 2,231 gal. / 12,230 liters
Regulations: EPA, SPCC, NPDES

4854-BK-SF

Dimensions: 14' L x 54' W x 1' H
4.26 m x 16.45 m x 30 cm
Weight: 252 lbs. / 114 kg
Sump Capacity: 5,654 gal. / 21,402 liters
Regulations: EPA, SPCC, NPDES

4860-BK-SF

Dimensions: 12' L x 60' W x 1' H
3.65 m x 18.28 m x 30 cm
Weight: 245 lbs. / 111 kg
Sump Capacity: 5,385 gal. / 20,384 liters
Regulations: EPA, SPCC, NPDES

4885-BK-SF

Dimensions: 14' L x 85' W x 1' H
4.26 m x 25.90 m x 30 cm
Weight: 420 lbs. / 190.5 kg
Sump Capacity: 8,901 gal. / 33,693 liters
Regulations: EPA, SPCC, NPDES

ACCESSORIES

Call for more information.

GROUND PAD

TRACMAT

STORAGE BAG

STINGER SNAP-FOAM BERM™

TRUE DRIVE IN/DRIVE-OUT CAPABILITY

The AZTEC Snap-Foam Berm allows for one-time set-up and then continual drive in and drive out without ever having to set down the end sidewalls. The Foam Sidewall system consists of urethane (fed. Spec. PPP-C-1752D, Type 1, Class 1, Grade A) encased in a fuel/chemical resistant membrane cover. The end sidewall design incorporates high strength connectors and a two way air-relief system that facilitates automatic entry/exit without assistance. The foam logs are utilized on the entry/exit so that a tanker can be driven in or out at will. The Snap-Foam Berm is manufactured and tested to ASTM-D751, D1117, D2136, D1204, D4833, D1149, D543, G-26. The Snap-Foam Berm is made of rugged and resistant 30oz/32 MIL fabric material. Custom sizes available, standard color is black.

- True drive in/drive out capability
- Easy to assemble design permits immediate response
- Compact storage and transport
- Air-lance tested containment welds for maximum product performance
- Foam end caps form 2-way air-relief system to snap end sidewalls back automatically to their upright position
- Lap joint welds for maximum strength
- Individual serial numbers
- CAD designed and cut components
- Fuel/chemical resistant containment area
- Custom sizes and special materials available

Shown with TracMat



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact



Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



STINGER YELLOW JACKET™

Why carry sorbents? Carry this lightweight, portable pallet anywhere and prevent spills from occurring. Made of 22 oz. vinyl-coated polyester, it's chemical-resistant, stands up to corrosive battery acid, and is a great addition to any Spill Kit. Stop storing truck, automobile and small forklift batteries on the ground or on wooden pallets. Order optional polyethylene grates...removable for easy access to the sump. Stinger Yellow Jacket folds up for compact storage and transport. Unique snap-up support stays create a sturdy sidewall when unit is opened. Excellent for decontamination applications.



Optional grates available (Product No. 7006-BK, fits #5710-YE, #5720-YE, #5730-YE and #5740-YE).

DRIPILLOW BERM™

Have a small leak or spill? Dripillow Berm comes in four sizes to capture small leaks and drips, and with its stable weighted base, it will not tip or splash in windy conditions. Designed to be utilized as a durable and portable drip-pan, it is useable with all fuels and hydrocarbons, comes with a UV protected pad, and can be folded for easy carrying. Eliminates nuisance drips under vehicles, hydraulic lines, or equipment. Replaceable UV Resistant Pads available for reorder. (Safety yellow is standard color. Available in other colors by special request).

- No tipping or splashing.
- Weighted unit can handle 40 mph winds.
- Folds for easy carrying.
- Replaceable UV protected pad available.



SPECIFICATIONS

STINGER YELLOW JACKET 5700-YE

Containment: 4' L x 4' W x 8" H
Dimensions: 1.22 m x 1.22 m x 20 cm
Weight: 13 lbs. / 7 kg
Sump Capacity: 80 gal. / 302 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5706-YE

Containment: 6' L x 6' W x 8" H
Dimensions: 1.83 m x 1.83 m x 20 cm
Weight: 24 lbs. / 11 kg
Sump Capacity: 180 gal. / 681 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5708-YE

Containment: 10' L x 10' W x 8" H
Dimensions: 3.05 m x 3.05 m x 20 cm
Weight: 52 lbs. / 24 kg
Sump Capacity: 501 gal. / 1,896 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5710-YE

Containment: 4' L x 6' W x 8" H
Dimensions: 1.22 m x 1.83 m x 20 cm
Weight: 18 lbs. / 9 kg
Sump Capacity: 120 gal. / 454 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5720-YE

Containment: 4' L x 8' W x 8" H
Dimensions: 1.22 m x 2.44 m x 20 cm
Weight: 24 lbs. / 13 kg
Sump Capacity: 160 gal. / 605 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5730-YE

Containment: 8' L x 8' W x 8" H
Dimensions: 2.44 m x 2.44 m x 20 cm
Weight: 35 lbs. / 16 kg
Sump Capacity: 320 gal. / 1,211 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

5740-YE

Containment: 8' L x 10' W x 8" H
Dimensions: 2.44 m x 3.05 m x 20 cm
Weight: 34 lbs. / 19 kg
Sump Capacity: 400 gal. / 1,514 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

DRIPILLOW BERM™ SMALL

Product No.: 5650-YE
Ext. Dimensions: 22" L x 22" W x 3" H
56 cm x 56 cm x 8 cm
Weight: 7 lbs. / 3.2 kg
Sump Capacity: 1 gal. / 3.8 liters

MEDIUM

Product No.: 5660-YE
Ext. Dimensions: 24" L x 36" W x 3" H
61 cm x 91 cm x 8 cm
Weight: 8 lbs. / 4 kg
Sump Capacity: 2 gal. / 7.6 liters

LARGE

Product No.: 5670-YE
Ext. Dimensions: 24" L x 54" W x 3" H
61 cm x 137 cm x 8 cm
Weight: 9 lbs. / 5 kg
Sump Capacity: 3 gal. / 11.4 liters

X-LARGE

Product No.: 5680-YE
Ext. Dimensions: 38" L x 42" W x 3" H
96 cm x 107 cm x 8 cm
Weight: 9 lbs. / 4 kg
Sump Capacity: 4 gal. / 15.1 liters

BAZOOKA®

Product No.: BAZOOKA
Dimensions: 5" O.D. x 12" L
Weight: 8 lbs. / 3.63 kg
Regulations: EPA, SPCC, NPDES

BAZOOKA® & INSTALLATION KIT

Product No.: BAZOOKA-12KIT
Dimensions: 5" O.D. x 16.5" L
Weight: 10 lbs. / 4.53 kg
Regulations: EPA, SPCC, NPDES

BAZOOKA®

TRICKLE FILTER w/AUTOMATIC SHUTOFF

Introducing an exciting new product from ENPAC, The Imbiber Bead Bazooka! It's an automated shut off system which allows water drainage of containment berm applications, but also utilizes an innovative system for detection of Class I & II organics such as diesel fuel. Water will continually drain through the filter. But, in case of a spill within the berm...when an organic substance is detected, the Imbiber Bead technology takes over, and the flow is completely shut off. It's a virtually maintenance free design with very simple upkeep.



- Trickle filter allows water flow rate of 20 gallons per minute
- Unique Imbiber Bead Indicator® pre-filter signals presence of organic substance with a distinct color change
- Imbiber Beads inside capture the organic substance, and by doing so, shut off flow through the filter
- Virtually maintenance free!

NEW

BAZOOKA® INSTALLATION KIT

The kit contains all you need for an easy field installation of the ENPAC Imbiber Bead Bazooka, and can be completed in just minutes.



Simple, step-by-step instructions are included.



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

SET-UP IS AS EASY AS 1, 2, 3....



Reusable! When you're done, just fold and place on a shelf.
Frees up valuable floor space.

SPILLPAL™


THE MOST AFFORDABLE, THE MOST CONVENIENT TEMPORARY STORAGE.

The flexible-sidewall SpillPal line is the easiest to use and the most affordable hazardous material storage product on the market today.

SpillPal provides incidental spill control during temporary storage of drums, machine parts, tanks and generators and can also be used as a washdown pad or pumping station. An alternative to hard plastic pallets that need to be moved by a forklift and are always in the way, AZTEC's SpillPal features 4" foam sidewalls that easily spring back into place after any type of pressure is applied. With six configurations, SpillPal almost eliminates the need for bulky, hard plastic pallets. Custom sizes available.



Store anything from one drum to two IBCs! Six models are available, each with or without optional grates, shown on page 21.



The 4-drum unit holds one IBC; 8-drum unit holds two IBCs.



No more ramps. Flexible sidewalls spring back to form – allows easy drive-in and drive-out with a hand truck or forklift.

SPECIFICATIONS

1-DRUM SPILLPAL™

Product No.: 5750-YE
Dimensions: 2' L x 2' W x 4" H
.61 m x .61 m x 10 cm
Weight: 2 lbs. / 1 kg
Sump Capacity: 10 gal. / 37.9 liters
Regulations: EPA, SPCC and NPDES

2-DRUM SPILLPAL™

Product No.: 5755-YE
Dimensions: 2' L x 4' W x 4" H
.61 m x 1.22 m x 10 cm
Weight: 3 lbs. / 1.4 kg
Sump Capacity: 20 gal. / 75.7 liters
Regulations: EPA, SPCC and NPDES

4-DRUM SPILLPAL™

Product No.: 5760-YE
Dimensions: 4' L x 4' W x 4" H
1.22 m x 1.22 m x 10 cm
Weight: 4.5 lbs. / 2.04 kg
Sump Capacity: 40 gal. / 151.4 liters
Regulations: EPA, SPCC and NPDES

4-DRUM IN-LINE SPILLPAL™

Product No.: 5765-YE
Dimensions: 2' L x 8' W x 4" H
.61 m x 2.4 m x 10 cm
Weight: 5.5 lbs. / 2.5 kg
Sump Capacity: 40 gal. / 151.4 liters
Regulations: EPA, SPCC and NPDES

6-DRUM SPILLPAL™

Product No.: 5770-YE
Dimensions: 4' L x 6' W x 4" H
1.22 m x 1.83 m x 10 cm
Weight: 6.5 lbs. / 2.9 kg
Sump Capacity: 60 gal. / 227 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

8-DRUM SPILLPAL™

Product No.: 5775-YE
Dimensions: 4' L x 8' W x 4" H
1.22 m x 2.4 m x 10 cm
Weight: 7.5 lbs. / 3.4 kg
Sump Capacity: 80 gal. / 302.8 liters
Regulations: EPA 40 CFR 264.175, SPCC and NPDES

OPTIONAL GRATES AVAILABLE

Call for more information.



PROWLER™ POOL

THE EASIEST, LIGHTEST SPILL CONTAINMENT POOL AVAILABLE.

Prowler Pop-up Pools offer excellent resistance to the widest range of chemicals, acids, fuels and other hazardous materials. Also resistant to cold temperatures to -65°F, abrasion, punctures and UV rays. Prowler is half the weight of comparably sized PVC pools while offering twice the strength. Fits easily into spill response kits.



Compact, lightweight and portable. Excellent for immediate spill response.



HAZMAT POOL™

Set-up of the Hazmat Pool takes seconds. The Hazmat Pool is an inexpensive, quick deployment pool, that is small enough to be stowed on any truck or emergency response vehicle. Decontaminate for reuse, or discard according to regulations. Optional drain is available.

Hazmat Pool has excellent puncture, abrasion and chemical resistance, along with a -65°F cold crack. With resistance to the widest range of chemicals, AZTEC's Hazmat Pool is your answer to decontamination.



SPECIFICATIONS

PROWLER™ POOLS

5920-YE

Dimensions: 28" base x 13" H x 18" top
71 cm x 33 cm x 46 cm
Sump Capacity: 20 gal. / 75.7 liters
Regulations: EPA, SPCC and NPDES

5966-YE

Dimensions: 48" base x 14" H x 36" top
122 cm x 33 cm x 91 cm
Sump Capacity: 66 gal. / 249.8 liters
Regulations: EPA, SPCC and NPDES

5900-YE


Dimensions: 48" base x 18" H x 32" top
122 cm x 46 cm x 152 cm
Sump Capacity: 100 gal. / 378.5 liters
Regulations: EPA, SPCC and NPDES

5950-YE

Dimensions: 60" base x 18" H x 44" top
198 cm x 46 cm x 152 cm
Sump Capacity: 150 gal. / 567.8 liters
Regulations: EPA, SPCC and NPDES

HAZMAT POOL™

Product No.: 5901-YE
Dimensions: 74" base x 8" H x 67" top
152 cm x 15 cm x 137 cm
Sump Capacity: 100 gal. / 378.5 liters
Optional Drain: 5901-YE-D

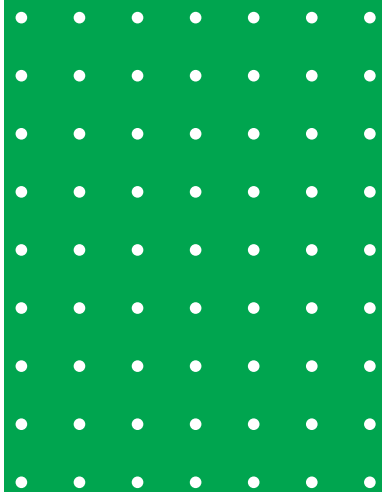

For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact



Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



STORM SENTINEL™

Regulations: EPA, SPCC and NPDES

Product No.: 1340

Description: Sediment Only,
Round

Product No.: 1341

Description: Sediment Only,
Rectangular

Product No.: ENP-IE0077

Description: Non-leaching
Hydrocarbon Packet

Product No.: 1343

Description: Sediment & Oil, (w/packet)
Round

Product No.: 1344

Description: Sediment & Oil, (w/packet)
Rectangular

STORM SENTINEL™ ADJUSTABLE CATCH BASIN INSERT

The Storm Sentinel Drain Protection Inserts help companies comply with Stormwater Pollution Prevention Plans and Stormwater Best Management Practices by protecting your storm drains and catch basins. It's the sure way to catch oil and sediment headed into storm drains and sewers. Equipped with an oil-absorbent media

in a screened bag, The Storm Sentinel guards against any potential discharge.



NEW

- Fits any size rectangular catch basin up to 24" x 36" and round basins up to 24" x 26".
- Custom sizes available
- 300 GPM overflow rate helps avoid ponding.
- Requires no special tools to install.
- Helps comply with NPDES, 40 CFR 122.26 (1999) when used as Best Management Practice in Storm Water Pollution Prevention Plans.



TO INSTALL: Remove grate and adjust wire frame to fit in recess.



Place insert into recess and frame into corners.



Replace metal grate.



No part of the insert extends above the surface.



TO REMOVE: Simply lift the grate, grab the handle and pull out the insert.

Insert won't fall into the basin, even when fully loaded. Dispose of the used insert according to company policy and all applicable laws and regulations.

GREAT FOR USE IN:

- Industrial Facilities
- Construction Sites
- Parking Lots
- Drive-Up Retail Facilities



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

UNIVERSAL POLY-DRUM FUNNEL™, UNIVERSAL POLY-DRUM SAFETY FUNNEL™ & UNIVERSAL POLY-DRUM FUNNEL™ COVER

Universal Poly-Drum Funnel, Part No. 3004-YE. Fits both closed-head and open-head 55-gallon drums, and other containers. Just set it and forget it. Exclusive features include patented scalloped design, high side wall and bung fitting holders. Add the optional cover for more value!



Universal Poly-Drum Safety Funnel, Part No. 3004-YE-SF. All the same features as the Universal Poly-Drum Funnel plus a non-sparking safety bung closure with flame arrestor. Ideal for flammable liquids. Optional cover available.

Universal Poly-Drum Funnel Cover, Part No. 3040-YE. Optional lockable cover (lock not included) for use with Part No.s 3004-YE and 3004-YE-SF. A snap to install with all necessary hardware and instructions included.



POLY-PAIL FUNNEL™
Product No. 3005-YE
Mounts to 3.5-, 5-, and 6-gallon tight-head pails. Also fits open-top pails with 12" diameter.



POLY-PAIL FUNNEL™ COVER
Product No. 3051-YE
For use with Product No. 3005-YE



POLY-DRUM TOPPER™
Product No. 3065-BK
Our Drum Topper snaps directly onto any 55-gallon open or closed-head drum to keep out debris and protect drum tops.

SPECIFICATIONS

UNIVERSAL POLY-DRUM™ FUNNEL

Product No.: 3004-YE
Diameter Exterior: 26" / 66 cm
Diameter Interior: 22" / 56 cm
Height Exterior: 5.5" / 14 cm
Height Interior: 4" / 10 cm
Weight: 3 lbs. / 1.4 kg
Regulations: EPA, SPCC and NPDES

UNIVERSAL POLY-DRUM™ SAFETY FUNNEL

Product No.: 3004-YE-SF
Diameter Exterior: 26" / 66 cm
Diameter Interior: 22" / 56 cm
Height Exterior: 5.5" / 14 cm
Height Interior: 4" / 10 cm
Weight: 5 lbs. / 2.3 kg
Regulations: EPA, SPCC and NPDES

UNIVERSAL POLY-DRUM™ FUNNEL COVER

Product No.: 3040-YE
Diameter Exterior: 26" / 66 cm
Diameter Interior: 22" / 56 cm
Height Exterior: 5.5" / 14 cm
Height Interior: 4" / 10 cm
Weight: 3 lbs. / 1.4 kg

POLY-PAIL FUNNEL™

Product No.: 3005-YE
Diameter Exterior: Top: 9.25" / 23 cm
Bottom: 11" / 28 cm
Diameter Interior: 8.5" / 22 cm
Height Exterior: 2.75" / 7 cm
SW Ht: 2.75" / 7 cm
Height Interior: SW Ht: 2.375" / 6 cm
Weight: 2 lbs. / 1 kg
Regulations: EPA, SPCC and NPDES

POLY-PAIL FUNNEL™ COVER

Product No.: 3051-YE
Diameter Exterior: 9.38" / 24 cm
Height Exterior: 2.38" / 6 cm
Weight: 3 lbs. / 1 kg

POLY-DRUM TOPPER™

Product No.: 3065-BK
Diameter Exterior: 25.25" / 64 cm
Height Exterior: 3.75" / 10 cm
Weight: 1.5 lbs. / 0.68 kg



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

POLY-SPILLPADS™

5600-YE

Dimensions:	31.25" L x 31.25" W x 2.25" H 79 cm x 79 cm x 6 cm
Weight:	13 lbs. / 5.8 kg
Load Bearing	
Capacity UDL	4000 lbs / 1800 kg
Sump Capacity:	2 gal. / 7.6 liters
Regulations:	EPA, SPCC and NPDES

5610-YE

Dimensions:	31.5" L x 54" W x 2.25" H 80 cm x 137 cm x 6 cm
Weight:	21 lbs. / 9.54 kg
Load Bearing	
Capacity UDL	8000 lbs / 3600 kg
Sump Capacity:	7.5 gal. / 28.5 liters
Regulations:	EPA, SPCC and NPDES

5620-YE

Dimensions:	55.5" L x 55" W x 2.25" H 141 cm x 139 cm x 6 cm
Weight:	25 lbs. / 11.25 kg
Load Bearing	
Capacity UDL	16000 lbs / 7200 kg
Sump Capacity:	12 gal. / 45.6 liters
Regulations:	EPA, SPCC and NPDES

POLY-EDGE™

Product No.:	1601-BK
Dimensions:	34.75" L x 20" W x 15" H .625" slots
Weight:	14 lbs. / 6 kg

POLY-LABTRAY™

Product No.:	5248-YE
Dimensions:	
Base:	25" L x 21.5" W x 3" H 63 cm x 55 cm x 7 cm
Grate:	20.75" L x 17.25" W 53 cm x 44 cm
Weight:	6.5 lbs. / 2.9 kg
Load Bearing	
Capacity UDL	40 lbs / 18 kg
Sump Capacity:	2.5 gal. / 9.5 liters
Regulations:	EPA, SPCC and NPDES

Q-VAC 100™

Product No.:	QVAC
Air Flow at 87 psi:	35cfpm
Compressor PSI	
(Minimum / Optimum):	30 / 87 psi
Sound Level:	80 dB (A)
Optimum Compressor:	10 HP

POLY-SPILLPAD™

Keep your floor clean with Poly-Spillpad! Handles spent batteries, 5-gallon pails, 16-gallon drums and your messiest "smaller" jobs. Sturdy inner polyethylene grate provides protection while vinyl berm keeps incidental spills contained. Poly-Spillpad is lightweight and easily moved. Great on your plant floor...or travels with you to prevent incidental spills on the go! The large sump area allows for an extended response time.

- Removable grate allows easy access to the sump
- Grate is made of 100% polyethylene



POLY-EDGE™

MULTI-FUNCTIONAL STORAGE UNIT OFFERS TRANSPORTABLE CONVENIENCE.

The Poly-Edge can be used as a truck-mounted carrier spill response unit or wall-mounted unit in such applications as manufacturing facilities, laboratories and hospitals.

The lockable, large capacity unit offers versatile storage for tools and absorbents as well as AZTEC's Stinger Berms and Prowler Pools.

- Will not rust or corrode.
- Slotted footprint makes mounting easy.
- Constructed of lightweight 100% polyethylene.
- A special weather and water-resistant gasket keeps stored items dry.




POLY-LABTRAY™


BRINGS SPILL PROTECTION TO THE LABORATORY BENCH.

Poly-Labtray reduces spills and overflows of liquid and free-flowing powder chemicals during transfer of material in the laboratory. Its large surface holds four 1-gallon bottles (up to 40 lbs. static load weight) and the unit features up to 2.5 gallon sump capacity, which also makes it perfect for mixing small containers at production sites. There are no metal parts to rust or corrode.


- Low-profile unit is only 3" high
- Small 25" x 21.5" footprint



Controls spills as they happen.



Removable grate for easy cleaning.

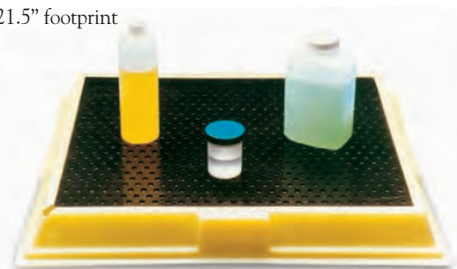

Q-VAC™ 100

SHOWN WITH OPTIONAL DRUM AND SCOOTER

Easy-to-use and highly reliable, the Q-VAC100 pumps liquid directly into a standard drum for convenient storage or recycling. A liquid overflow shutoff valve ensures vacuum automatically turns off when drum is full. Works on shop air.

MORE Q-VAC™ 100 ADVANTAGES

- Fits on a standard 55-gallon closed top drum
- Requires no filters
- No moving parts to break or replace



DUAL CYLINDER DOLLY™

EASIER CYLINDER LOADING, BETTER MANEUVERABILITY AND LARGE TRAY FOR TOOLS.

The Dual Cylinder Dolly is designed to be a more functional, maneuverable and better balanced transporter for gas cylinders than conventional dollies or forklifts. Ideal for industrial or construction operations, the Dual Cylinder Dolly accommodates any two cylinders, each up to 12" in diameter, including class 300 SCF industrial gas cylinders and No. 5 acetylene cylinders.

The dolly's lightweight yet durable polyethylene construction and effective counter balancing makes it easy to handle with a minimum of physical effort. Tough 16.5" diameter pneumatic wheels offer the best maneuverability over any terrain.

Unlike metal cylinder carts, the Dual Cylinder Dolly is spark-resistant and the rugged polyethylene construction will not rust or corrode under harsh weather conditions.



36" built-in tray holds tools, valves and torches.



SINGLE CYLINDER DOLLY™ HD



Just as durable and half the size. The Single Cylinder Dolly HD is designed for demanding industrial facilities or tough outdoor applications in which transport of a single cylinder is required. Accommodates one cylinder, up to 12" in diameter, including class 300 SCF industrial gas cylinders and No. 5 acetylene cylinders.



Pneumatic wheels standard on Part No. 7301-BK-A maximize maneuverability over rough terrain.



2-CYLINDER POLY-STAND™

Ideal for inexpensive wall-mounted storage. Accommodates two cylinders with diameters of 3" to 12-3/8".

4-CYLINDER POLY-STAND™

Storage and transport unit in one. The 4-Pack Cylinder Stand is forkliftable and floor mountable. Specially designed so even unbalanced loads can be moved with ease. Holds four cylinders up to 12-3/8" in diameter. Add optional lower strap to bottom for extra security (Product No. 7205-BK).

Note: Upper and lower cylinder straps must be installed and tightened for transport applications.

SPECIFICATIONS

DUAL CYLINDER DOLLY™

Product No.:	7302-BK
Dimensions:	36.5" L x 26.25" W x 45.2" H 93 cm x 67 cm x 115 cm
Weight:	61 lbs. / 27.45 kg
Load Bearing	
Capacity UDL:	500 lbs / 225 kg

SINGLE CYLINDER DOLLY™ HD

Product No.:	7301-BK
Dimensions:	22.5" L x 24.75" W x 46" H 57 cm x 65 cm x 117 cm
Weight:	31 lbs. / 27.45 kg
Load Bearing	
Capacity UDL:	250 lbs / 113.4 kg

SINGLE CYLINDER DOLLY™ HD ATD

Product No.:	7301-BK-A
Dimensions:	25.5" L x 24.75" W x 46" H 64 cm x 65 cm x 117 cm
Weight:	35 lbs. / 15.87 kg
Load Bearing	
Capacity UDL:	250 lbs / 113.4 kg

2-CYLINDER POLY-STAND™


Product No.:	7212-YE
Dimensions:	28" L x 14" W x 30" H 71 cm x 36 cm x 76 cm
Weight:	17.5 lbs. / 8 kg
Load Bearing	
Capacity UDL:	400 lbs / 180 kg

4-CYLINDER POLY-STAND™

Product No.:	7213-YE
Dimensions:	41.75" L x 29" W x 46" H 106 cm x 74 cm x 117 cm
Weight:	55 lbs. / 24.75 kg
Load Bearing	
Capacity UDL:	800 lbs / 360 kg
Regulations:	OSHA 29 CFR.1910

CYLINDER STRAP

Product No.:	7205-BK
Weight:	1 lb. / 0.5 kg
Regulations:	OSHA 29 CFR.1910

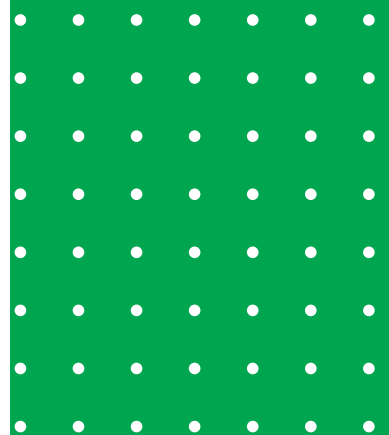

For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact
Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

6-PACK CYLINDER RACK™

Product No.: 7202-YE
Dimensions: 48" L x 31" W x 41" H
121 cm x 79 cm x 104 cm
Weight: 62 lbs. / 28 kg
Load Bearing
Capacity UDL: 1200 lbs / 540 kg

6-PACK RAMP

Product No.: 7203-BK
Dimensions: 46" L x 20" W x 6" H
117 cm x 51 cm x 15 cm
Weight: 20 lbs. / 9 kg
Load Bearing
Capacity UDL: 600 lbs / 270 kg

CASTER FRAME

Product No.: 7204-BK
Dimensions: 33.5" L x 31.5" W x 4.5" H
83 cm x 78 cm x 11 cm
Weight: 49.5 lbs. / 22.4 kg
Load Bearing
Capacity UDL: 1200 lbs / 543 kg

POLY-CYLINDER BUMPER BRACKET™ /SINGLE

Product No.: 7211-YE
Dimensions: 15" L x 4" W x 3" H
38 cm x 10 cm x 8 cm
Weight: 1.5 lbs. / 0.7 kg
Regulations: OSHA 29 CFR.1910

POLY-CYLINDER BUMPER BRACKET™ /DOUBLE

Product No.: 7210-YE
Dimensions: 24" L x 4" W x 3" H
61 cm x 10 cm x 8 cm
Weight: 2 lbs. / 0.9 kg
Regulations: OSHA 29 CFR.1910

POLY-CYLINDER MODULAR BUMPER BRACKETS™

Center Section
Product No.: 7215-YE
Dimensions: 16" L x 4" W x 4" H
41 cm x 10 cm x 10 cm
Weight: 1.5 lbs. / 0.7 kg
Regulations: OSHA 29 CFR.1910

End Cap
Product No.: 7214-YE
Dimensions: 16" L x 4" W x 4" H
41 cm x 10 cm x 10 cm
Weight: 1.5 lbs. / 0.7 kg
Regulations: OSHA 29 CFR.1910

6-PACK CYLINDER RACK™

(SHOWN WITH OPTIONAL RAMP)

Maximize floor space while eliminating clutter and safety hazards by properly storing your industrial cylinders. Efficiently sized to easily move through standard doorways. Forkliftable! Handles cylinders 3" to 10" diameter. Add optional lower strap to bottom for extra security (Product No. 7205-BK).



CASTER FRAME

Gives the 6-Pack Cylinder Rack mobility to go anywhere!

Note: Upper and lower cylinder straps must be installed and tightened for transport applications.



POLY-CYLINDER BUMPER BRACKETS™

Choose from our single or double cylinder design. Bumper brackets easily and securely attach to any wall. Both models accommodate cylinders with diameters 3" to 10".



POLY-CYLINDER MODULAR BUMPER BRACKETS™

For modular flexibility, design your own configuration to hold one, two or three cylinders. Attaches to any wall securely and easily. Accommodates cylinders from 3" to 10" in diameter. Saves on wall space.

BASIC INFORMATION ON REGULATIONS REFERENCED IN ENPAC'S CATALOG

Salvage Drums, DOT 49CFR173.3(c):

Ref (c) – (c) (7) “Salvage Drums. Packages of hazardous materials that are damaged, defective, or found leaking and hazardous materials that have spilled or leaked may be placed in a metal or plastic removable head salvage drum that is compatible with lading and shipped for repackaging or disposal under the following conditions:

“...the drum must be a UN 1A2, 1B2, 1N2 or 1H2 tested and marked for Packing Group III or higher performance standards for liquids or solids and a leakproofness test of 20 kPa (3 psig).

Capacity of the drum may not exceed 450 L (119 gallons).

Each drum shall be provided when necessary with sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed. All cushioning and absorbent material used in the drum must be compatible with the hazardous material.

...the packaging must be marked “SALVAGE” or “SALVAGE DRUM”.

The overpack requirements of (Section) 173.25 do not apply to drums used in accordance with this paragraph.

A salvage packaging marked “T” in accordance with applicable provisions in the UN Recommendations may be used.”

Containment, EPA 40CFR264.175:

Ref (b) (3) “...the containment system must have sufficient capacity to contain 10% of the volume of containers or the volume of the largest container, whichever is greater.”

Spill Prevention, Control and Countermeasure (SPCC) EPA 40CFR112:

SUMMARY: The SPCC regulation is the national oil spill regulation. The purpose of the SPCC regulation is prevention of oil discharge into navigable waters and related areas, rather than cleanup after a spill has occurred. The regulation generally affects all facilities with at least 1320 gallons aboveground storage capacity, or 42000+ gallons underground storage capacity. The SPCC requires affected facilities to prepare and file an action plan (the SPCC Plan).

Affected facilities include, among others onshore and offshore drilling, platforms, barges and mobile facilities; fixed and mobile onshore or offshore production; oil refining and storage; any industrial, commercial, agricultural or public facility that uses or stores oil; some waste treatment operations; loading racks, transfer hoses and related equipment; vehicles and pipelines. Oils, fats and greases of any kind or in any form are specifically included in the regulation.

The SPCC Plan must include certain elements, such as Operating procedures to prevent oil spills; Control measures to prevent spilled oil from entering surface water; Countermeasures such as Secondary Containment for spills and bulk storage compliance; Professional Engineer certification; Management approval; Facility inspections; Security; Training and more. For more information, visit the website WWW.EPA.GOV/OILSPILL, or contact your regional EPA SPCC Coordinator. To report an oil or chemical spill, CALL THE NATIONAL RESPONSE CENTER AT 800/424-8802.

Stormwater regulations, National Pollutant Discharge Elimination System (NPDES) EPA 40CFR122.26

SUMMARY: NPDES requires implementation of “Best Management Practices” (BMP’s). A BMP is literally a course of action which, through its implementation helps “to manage the quantity and improve the quality of stormwater runoff” and meets or exceeds the “Minimum Control Measures” performance objectives of the federal NPDES regulation for limiting the discharge of pollutants to surface water supplies via stormwater runoff.

NPDES requires Minimum Control Measures to be put into place by activities in affected Urbanized Areas (UA). There are 405 Urbanized Areas in the US listed in Appendix 6 of the 2000 US Census. Urbanized Areas are not necessarily just cities, but also include suburbs and other nearby areas. Appendix 6 contains detailed maps of each Urbanized Area and can be accessed on-line through the US EPA Office of Wastewater Management (OWM) website WWW.EPA.GOV/OWM to determine if a particular place is in an affected UA.

The applicable regulations require affected activities to develop a program to manage stormwater discharges from their facilities. This management program includes, among others, the development and implementation of a Stormwater Pollution Prevention Plan (SWPPP) including BMP’s. The SWPPP identifies: Potential Sources of Pollution and Exposed Materials, including a History of Past Spills & Leaks; BMP’s; Non-Structural controls such as Good Housekeeping Practices and Spill Prevention & Response; and Structural controls such as Containment including Pollution Incident Prevention Plans (PIPP) and Spill Prevention, Control, and Countermeasures (SPCC) plans.



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact

Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com



POLYETHYLENE/CHEMICAL COMPATIBILITY GUIDE

KEY:

L =Products should be suitable for prolonged or repeated contact with these substances, under the conditions specified.

S =These substances may adversely affect the polyethylene. ENPAC products may be suitable for intermittent contact; however, some deterioration in properties may occur. The user should perform qualification tests before or during usage of the container.

N =These substances aggressively attack polyethylene or have vapor pressures incompatible with closed containers. Do not use polyethylene containers in these applications.

Acetaldehyde (40%),	L
Acetamide,	L
Acetic Acid (50%),	L
Acetic Acid (100%),	N
Acetic Acid Anhydride,	S
Acetic Ether,	S
Acetone,	S
Acetylene Tetrabromide,	S
Acrylic Emulsions,	S
Acrylonitrile,	L
Adipic Acid,	L
Aliphatic Hydrocarbons (Hexane, Octane, hexene, Octene, Etc.),	L
Allyl Alcohol (96%),	L
Alum (Aqueous Solutions),	L
Aluminum Chloride (20%),	L
Aluminum Fluoride,	L
Aluminum Hydrogen Solution (10%),	L
Aluminum Hydroxide,	L
Alums (All Types),	L
Ammonia (Anhydrous),	L
Ammonia (Aqueous),	L
Ammonia (100% Dry Gas),	L
Ammonium Salts,	L
Ammonium Acetate,	L
Ammonium Bifluoride,	L
Ammonium Carbonate 50%,	L
Ammonium Chloride,	L
Ammonium Hydrogen Fluoride (50%),	L
Ammonium Hydroxide,	L
Ammonium Metaphosphate Sat'd,	L
Ammonium Nitrate (10%),	L
Ammonium Nitrate Sat'd,	L
Ammonium Persulfate Sat'd,	L
Ammonium Phosphate,	L
Ammonium Sulfate (1%),	L
Ammonium Sulfate Sat'd,	L
Ammonium Sulfide Sat'd,	L
Ammonium Thiocyanate Sat'd,	L
Amyl Acetate,	L
Amyl Alcohol (100%),	N
Amyl Chloride,	N
Aniline (100%),	S
Aniline Hydrochloride,	S
Animal Fats,	L
Anti-Freeze,	L
Antimony Salts,	L
Antimony Trichloride 90%,	L
Aqua Regia,	N
Aqueous Salt Solutions (NaCl),	L
Aqueous Alkalies (NaOH),	L
Arsenic Acid,	L
Arsenic Salts,	L
Barium Salts,	L
Barium Carbonate,	L
Barium Chloride,	L
Barium Cyanide,	L
Barium Hydroxide,	L
Barium Nitrate,	L
Barium Sulfate,	L
Barium Sulfide,	L
Battery Fluid Acid,	S
Beef Tallow Emulsion, Sulfonated,	L
Beer,	L
Benzaldehyde,	L
Benzene,	L
Benzene Sulfonic Acid,	S
Benzoic Acid,	L
Benzyl Alcohol,	L
Benzyl Chloroformate,	L
Bismuth Salts,	L
Bleach Lye (10%),	S
Black Liquor,	L
Borax Cold Sat'd,	L
Boric Acid Dilute,	L
Boric Acid Conc.,	L
Bromine, Liquid,	N
Bromine, Water,	N
Bromobenzene,	N
Bromoform,	N
Butadiene,	L
Butane,	L
Butanediol (100%),	L
Butanol,	L
Butyl Acetate,	L
Butyl Alcohol (100%),	L
Butylene,	N
Butylene Glycol,	L
Butylene Liquid,	N
Butyl Phenol,	N
Butyric Acid,	L
Calcium Carbonate,	L
Calcium Chloride,	L
Calcium Hydroxide,	L
Calcium Hypochlorite,	L
Calcium Nitrate (50%),	L
Calcium Sulfate,	L
Camphor Oil,	N
Carbon Disulfide,	N
Carbonic Acid (Aq.CO2),	L
Carbon Monoxide,	L
Carbon Tetrachloride,	N
Castor Oil Conc.,	L
Caustic (Aqueous),	L
Caustic Potash Sol. (50%),	L
Caustic Soda Sol. (10%),	L
Chloral Hydrate,	L
Chloroethanol,	L
Chloric Acid (10%),	L
Chloroacetic Acid,	L
Chlorobenzene,	L
Chloroform,	N
Chloromethane,	N
Chlorosulfonic Acid 100%,	N
Chrome Alum Sat'd,	L
Chromic Acid (50%),	S
Cider,	L
Citric Acid (All Conc.),	L
Clorox Bleach,	L
Coconut Oil Alcohols,	L
Cola Concentrates,	L
Compressed Air Conditioning Oil,	L
Copper Salts,	L
Copper Cyanide,	L
Copper Nitrate,	L
Copper Sulfate,	L
Corn Oil,	L
Cottonseed Oil,	L
Cresol (90%),	L
Cresylic Acid,	L
Crotonic Aldehyde,	L
Cuprous Chloride Sat'd,	L
Cyclohexane,	L
Cyclohexanol,	L
Cyclohexanone,	S
Detergents, General,	L
Developer, Photographic,	L
Dextrin Sat'd,	L
Dextrose Sat'd,	L
Dibutyl Ether,	N
Dibutylphthalate,	S
Dibutyl Sebacate,	S
Dichloroacetic Acid,	S
Dichloroacetic Acid, Methyl Ester,	S
Dichlorobenzene, Liquid,	N
Dichloroethylene,	N
Diesel Fuel,	S
Diesel Oil,	S
Aqueous Salt Solutions (NaCl),	L
Aqueous Alkalies (NaOH),	L
Arsenic Acid,	L
Arsenic Salts,	L
Barium Salts,	L
Barium Carbonate,	L
Barium Chloride,	L
Barium Cyanide,	L
Barium Hydroxide,	L
Barium Nitrate,	L
Barium Sulfate,	L
Barium Sulfide,	L
Battery Fluid Acid,	S
Beef Tallow Emulsion, Sulfonated,	L
Beer,	L
Benzaldehyde,	L
Benzene,	L
Benzene Sulfonic Acid,	S
Benzoic Acid,	L
Benzyl Alcohol,	L
Benzyl Chloroformate,	L
Bismuth Salts,	L
Bleach Lye (10%),	S
Black Liquor,	L
Borax Cold Sat'd,	L
Boric Acid Dilute,	L
Boric Acid Conc.,	L
Bromine, Liquid,	N
Bromine, Water,	N
Bromobenzene,	N

Fatty Alcohol Sulfonate,	L
Ferric Salts,	L
Ferric Sulfate,	L
Ferrous Salts,	L
Ferrous Sulfate,	L
Fertilizer Salts,	L
Fish Solubles,	L
Fluoboric Acid,	L
Fluosilicic Acid (All Conc.),	L
Formaldehyde (40%),	L
Formamide,	N
Formic Acid (All Conc.),	L
Fruit Pulp,	L
Fuel Oil,	L
Furfural (100%),	L
Furfuryl Alcohol,	L
Gallic Acid Sat'd,	L
Gasoline,	L
Gasohol,	L
Gelatine,	N
Gin,	L
Gluconic Acid (All Conc.),	L
Glucose,	L
Glycerine,	L
Glycol,	L
Glycol Ethers,	L
Glycolic Acid (All Conc.),	L
Grape Sugar Sat'd Aq.,	L
Heptane,	L
Hexane,	L
Hexanol Tert.,	L
Hydrazine Hydrate,	L
Hydrodisulfite (10%),	N
Hydroxylamine Sulfate,	N
Hydrazine (35%),	L
Hydrazine Hydrochloride,	L
Hydroiodic Acid (All Conc.),	L
Hydrobromic Acid (50%),	L
Hydrocyanic Acid Sat'd,	L
Hydrochloric Acid (All Conc.),	L
Hydrofluoric Acid (All Conc.),	L
Hydrofluorsilicic Acid (All Conc.),	L
Hydrogen Bromide (10%),	L
Hydrogen Peroxide (90%),	L
Hydrogen Phosphide 100%,	L
Hydroquinone,	L
Hydrogen Sulfide,	L
Hypochlorous Acid,	L
Inks,	L
Iodine (Alc. Sol.) Conc.,	L
Iron Salts,	L
Iron-Octane,	S
Isopropyl Acetate,	L
Isopropyl Alcohol,	L
Isopropyl Ether,	N
Jetfuel,	S
Kerosene,	S
Lactic Acid (All Conc.),	L
Landlin,	L
Latex,	L
Lead Salts,	N
Lead Acetate Sat'd,	S
Lime,	S
Linseed Oil,	S
Lithium Salts,	S
Lube Oil,	N
Magnesium Salts,	N
Magnesium Carbonate,	S
Magnesium Hydroxide,	S
Magnesium Nitrate,	L
Magnesium Oxide,	L
Magnesium Sulfate,	L
Maleic Acid,	L
Malic Acid (1%),	L
Mercuric Salts,	L
Mercurous Salts,	S
Mercury,	S
Methanol,	S
Methyl Acetate,	N
Methyl Alcohol (100%),	N
Methyl Amine (32%) L,	L
Methyl Bromide,	N
Methyl Chloride,	N
Methylene Chloride,	N
Methyl Ethyl Ketone,	S
Methyl Isobutyl Ketone,	S
Methyl Isopropyl ketone,	S
Methyl Sulfate,	L
Methyl Sulfuric Acid (All Conc.),	L
Milk,	L
Mineral Oils,	L
Molasses,	L
Monochloroacetic Acid Ethyl Ester,	L
Monochloroacetic Acid Methyl Ester,	L
Morpholin,	N
Mowilith D,	L
Muriatic Acid	N
Naphtha,	L

Napthalene,	L
Nickel Salts,	L
Nicotine, Dilute,	L
Nicotinic Acid,	L
Nitric Acid <50%,	L
Nitrobenzene,	L
Nitrotoluene,	L
Octyl Cresol,	L
Oils and Fats,	L
Oleic Acid (All Conc.),	L
Oleum Conc.,	L
Olive Oil,	L
Orange Extract,	L
Oxalic Acid (All Conc.),	L
Palmitic Acid,	L
Palm Oil,	N
Paraffin Emulsions,	L
Paraffin Oil,	L
Perchloric Acid (50%),	L
Perchloroethylene,	N
Petroleum,	L
Petroleum Ether,	L
Phenol (90%),	L
Phenylhydrazine,	N
Phosphoric Acid All Conc.,	L
Phosphorous Chlorides,	S
Phosphorous Yellow (100%),	L
Phosphorous Pentoxide,	L
Photographic Solutions,	L
Phthalic Acid (All Conc.),	L
Phthalic Anhydride,	L
Pickling Baths, Sulfuric Acid,	L
Hydrochloric Acid,	L
Picric Acid (1%),	L
Plating Solutions,	L
Potash,	L
Potassium/Aluminum Sulfates (50%),	L
Potassium Bichromate,	L
Potassium Borate (10%),	L
Potassium Bromide,	L
Potassium Chlorate,	L
Potassium Chloride,	L
Potassium Chromate,	L
Potassium Cyanide,	L
Potassium Dichromate 40%,	L
Potassium Ferri/ Ferro Cyanide Sat'd,	L
Potassium Fluoride,	L
Potassium Hydroxide,	L
Potassium Iodide,	L
Potassium Nitrate Sat'd,	L
Potassium Perborate Sat'd,	L
Potassium Perchlorate,	L
Potassium Permanganate,	L
Potassium Persulfate Sat'd,	N
Potassium Phosphates,	S
Potassium Sulfate,	S
Propanol,	L
Propargyl Alcohol (7%),	L
Propionic Acid (50%),	L
Propyl Alcohol,	L
Propylene Dichloride (100%),	L
Propylene Glycol,	L
Propylene Oxide,	L
Pyridine,	S
Rayon Coagulation Salts,	L
Rust Inhibitors,	L
Sea Water,	L
Selenic Acid,	L
Sewage,	L
Shortening,	L
Silicic Acid,	L
Silicone Oil,	L
Silver Salts,	L
Silver Nitrate,	L
Soda Solution (All Conc.),	L
Soda Ash,	L
Sodium Salts,	L
Sodium Acetate Sat'd,	L
Sodium Acrylates,	L
Sodium Benzoate,	L
Sodium Bicarbonate,	L
Sodium Bisulfate (10%),	L
Sodium Bisulfite,	N
Sodium Bromate,	S
Sodium Bromide,	S
Sodium Bromide Dilute Sol.,	S
Sodium Carbonate,	L
Sodium Chlorate,	L
Sodium Chloride,	L
Sodium Chlorite,	L
Sodium Chromate,	L
Sodium Disulfite,	L
Sodium Dithionite (10%),	L
Sodium Ferricyanide,	L
Sodium Ferrocyanide Sat'd,	L
Sodium Fluoride Sat'd,	L
Sodium Hydroxide Conc.,	S

Sodium Hypochlorite,	L
Sodium Iodide,	L
Sodium Nitrate,	L
Sodium Oxalate,	L
Sodium Persulfate,	L
Sodium Phosphate,	L
Sodium Silicate,	S
Sodium Sulfate,	L
Sodium Sulfide,	L
Sodium Sulfite,	L
Sodium Sulfonates,	N
Sodium Thiosulfate,	L
Spindle Oil,	L
Stannic Salts,	L
Stannous Salts,	N
Starch Solution Sat'd,	L
Stearic Acid (All Conc.),	L
Succinic Acid,	L
Sugar Solutions, Glucose,	L
Lactose, Sucrose, etc.,	L
Sulfur,	L
Sulfuric Acid (98%),	S
Sulfuric Acid, Fuming,	N
Sulfurous Acid,	N
Sulfuryl Chloride,	N
Tallow,	L
Tannic Acid,	L
Tanning Extracts,	L
Tartaric Acid Sat'd,	L
Tetrachloroethane,	N
Tetrachloroethylene,	N
Tetraethyl Lead,	L
Tetrahydrofuran,	N
Tetrahydroxaphthalene,	N
Thionyl Chloride,	L
Tin Salts,	L
Titanium Salts,	S
Toluene,	S
Toluene Sulfonic Acid (All Conc.),	S
Transformer Oil,	L
Triethylphosphate,	L
Trichloroacetic Acid,	S
Trichloroethane,	N
Trichloroethylene,	N
Tricresyl Phosphate,	L
Triethanolamine,	L
Triocetyl Phosphate,	N
Trisodium Phosphate Sat'd,	L
Trichloroethylene,	N
Turpentine Oil,	N
Urea,	L
Urine,	L
Vegetable Oils,	L
Vinegar,	L
Vanilla Extract,	L
Wax Alcohol,	N
Wetting Agents,	L
Whisky,	L
White Acid (75%),	L
Wine,	L
Xylene,	N
Yeast,	L
Zinc Salts,	L
Zinc Sulfate,	L

IMPORTANT USER NOTICE

This data is a compilation of existing data obtained from leading chemical companies and independent reports and does not represent actual testing conducted by ENPAC Corporation.

This report is offered as a guide and was developed from information which, to the best of ENPAC's knowledge, was reliable and accurate. Due to variables and conditions of application beyond ENPAC's control, none of the data shown in this guide is to be construed as a guarantee, expressed or implied. ENPAC Corporation assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information herein.



INDUSTRIAL FABRIC/CHEMICAL COMPATIBILITY GUIDE

CHEMICAL ENVIRONMENTAL RESISTANCE FOR STINGER YELLOW JACKET™, DRIPILLOW BERM™, SPILLPAD™ & SPILLPAL™ PVC FABRIC

Rating Key: R = Recommended for use
NR = Not recommended
NA = Not tested
F = Failed

Ratings are based on visual physical examination of sample after removal from immersion in the test chemical at room temperature.

Results represent ability of the material to retain its performance properties when in contact with test chemical.

This report is offered as a guide and was developed from information, which, to the best of AZTEC's knowledge, was reliable and accurate.

Due to variables and conditions of application beyond AZTEC's control, none of the data shown on this guide is to be construed as a guarantee, expressed or implied. AZTEC Corporation assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information.

CHEMICAL deg. F	RATING @ 72				
Ammonium Bifluoride	R	Detergents	R	Mineral Oil	R
Ammonium Fluoride, 25%	R	Diethyl Ether	NR	Naptha	R
Ammonium Hydroxide	R	Diethylene Glycol	NA	Napthalene	NR
Ammonium Sulfate	R	Dimethyl Hydraxine	NR	Nitric Acid, 30%	R
Amyl Acetate	NR	Disodium Phosphate	R	Nitric Acid, 100%	NR
Aqua Regia	R	Ethers	NR	Oleic Acid	R
Beer	R	Esters	NR	Phosphoric Acid, 85%	R
Benzene	NR	Ethyl Alcohol	R	Potash	R
Benzyl Alcohol	NA	Ethylene Glycol	R	Potassium Chloride	R
Black Liquor	R	Fatty Acids	R	Potassium Hydroxide	R
Bleach 12.5%	R	Formaldehyde	R	Potassium Hypochlorite	R
Boric Acid	R	Fructose	R	Propyl Alcohol	R
Bromic Acid	R	Furfural	NR	Sea Water	R
Butane	R	Gasoline	F	Soaps	R
Butylene	R	Gin	R	Sodium Chloride	R
Calcium Chloride	R	Green Liquor	R	Sodium Hydroxide, 70%	R
Carbon Tetrachloride	NR	Hydrochloric Acid, 50%	R	Sodium Nitrate	R
Caronic Acid	R	Hydrofluoric Acid, dilute	R	Stearic Acid	NR
Castor Oil	R	Hyrdogen Peroxide, 90%	R	Sulfur	R
Chloric Acid, 20%	R	Hydrogen Sulfide, aqueous	R	Sulfuric Acid, 80%	R
Chlorine, Liquid	NR	Iodine Solution	NA	Sulfuric Acid, 100%	NR
Citric Acid	R	Ketones	NR	Tanning Liquors	R
Coconut Oil	NA	Lacquers	NA	Toluene, Toluol	NR
Copper Nitrate	R	Linseed Oil	R	Urea	R
Copper Sulfate	R	Magnesium Chloride	R	Vegetable Oil	R
Corn Syrup	R	Methyl Alcohol	R	Whiskey	R
Cottonseed Oil	R	Methyl Bromide	NR	Wines	R
		Methyl Ethyl Ketone	NR	Zinc Chloride	R
		Methylene Chloride	NR	Zinc Oxide	NA

INDUSTRIAL FABRIC/CHEMICAL COMPATIBILITY GUIDE

CHEMICAL ENVIRONMENTAL RESISTANCE FOR STINGER™ BERMS

The data shown are the result of laboratory tests and are intended to serve only as a guide. No performance warranty is intended or implied. The degree of chemical attack on any material is governed by the conditions under which it is exposed. Exposure time, temperature, and size of the area of

exposure usually varies considerably in application, therefore, this table is given and accepted at the user's risk.

Confirmation of the validity and suitability in specific cases should be obtained. When considering containment berms for specific applications, it is suggested that a fabric sample be tested in actual service before specification. Where impractical, tests should be devised which simulate actual service conditions as closely as possible.

EXPOSURE	RATING				
AFFF	A	ASTM Oil #2 (Flash pt. 240 C)	A	Ethanol	A
Acetic Acid (5%)	B	ASTM Oil #3	A	Ethyl Acetate	C
Acetic Acid (50%)	C	Benzene	X	Ethyl Alcohol	A
Ammonium Phosphate	T	Calcium Chloride Solutions	T	Fertilizer Solution	A
Ammonium Sulfate	T	Calcium Hydroxide	T	#2 Fuel Oil	A
Antifreeze (ethylene glycol)	A	20% Chlorine Solution	A	#6 Fuel Oil	A
Animal Oil	A	Clorox	A	Furfural	X
Aqua Regia	X	Conc. Ammonium Hydroxide	A	Gasoline	B
ASTM Fuel A (100% Iso-octane)	A	Corn Oil	A	Glycerin	A
		Crude Oil	A	Hydraulic Fluid-Petroleum Based	A
		Diesel Fuel	A		

For further enquiries, please contact your local Aztec Chemicals Representative. Alternatively, please contact



Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com

EXPOSURE	RATING				
Hydraulic Fluid -	C	Magnesium Hydroxide	T	Salt Water (25%)	B
Phosphate Ester Based		Methanol	A	Sea Water	A
Hydrocarbon Type II		Methyl Ethyl Ketone	X	Sodium Acetate Solutions	T
(40% Aromatic)	C	Mineral Spirits	A	Sodium Bisulfite Solution	T
Hydrochloric Acid (50%)	A	Naphtha	A	Sodium Hydroxide (60%)	A
Hydrofluoric Acid (5%)	A	Nitric Acid (5%)	B	Sodium Phosphate	T
Hydrofluoric Acid (50%)	A	Nitric Acid (50%)	C	Sulfuric Acid (50%)	A
Hydrofluosilicic Acid	A	Perchloroethylene	C	50% Tannic Acid	A
Isopropyl Alcohol	A	Phenol	X	Toluene	C
Ivory Soap	T	Phenol Formaldehyde	B	Transformer Oil	A
Jet A	A	Phosphoric Acid (50%)	A	Turpentine	A
JP-4 Jet Fuel	A	Phosphoric Acid (100%)	C	Urea Formaldehyde	A
JP-5 Jet Fuel	A	Phthalate Plasticizer	C	UAN	A
JP-8 Jet Fuel	A	Potassium Chloride	T	Vegetable Oil	A
Kerosene	A	Potassium Sulfate	T	Water (200F)	A
Magnesium Chloride	T	Raw Linseed Oil	A	Xylene	X
		SAE-30 Oil	A	Zinc Chloride	T

Rating Key: A = Fluid has little or no effect.
 B = Fluid has minor to moderate effect.
 C = Fluid has severe effect.
 T = No data / likely to be acceptable.
 X = No data / not likely to be acceptable.

Ratings are based on visual physical examination of samples after removal from the test chemical after the fabric samples were immersed for 28 days at room temperature. Results represent ability of material to retain its performance

properties when in contact with the indicated chemical.

This report is offered as a guide and was developed from information, which, to the best of AZTEC's knowledge, was reliable and accurate. Due to variables and conditions of application beyond AZTEC's control, none of the data shown in this guide is to be construed as a guarantee, expressed or implied. AZTEC Corporation assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information.

HOMELAND SECURITY 2006 AUTHORIZED EQUIPMENT LIST

SECTION 7-DETECTION EQUIPMENT

7.2.2.4: Kit, Chemical Sampling/Evidence, Containment Vessels (AEL Ref# 07CS-01-KVES)

- Poly-Overpack® Salvage Drums sizes 20-gallon through 110-gallon.

SECTION 8-DECONTAMINATION EQUIPMENT

8.2.6: Equipment, Technical Decontamination-Wet (AEL Ref# 08D2-06-TDEW).

- Stinger Yellow Jacket™ Decontamination Berms.
- Stinger™ Containment Berms, both the snap-up and snap-foam styles.
- SpillPal™
- Prowler™ Pools
- Hazmat Pool™
- 2-, 4-, 6-, & 8-Drum Workstations™
- QVAC™ 100
- Sorbents
- Spill Kits

8.2.11: Device, Liquid Decontamination Equipment (AEL Ref# 08D2-10-LDCD)

- Stinger Yellow Jacket™ Decontamination Berms.
- Stinger™ Containment Berms, both the snap-up and snap-foam styles.
- SpillPal™
- Prowler™ Pools
- Hazmat Pool™
- 2-, 4-, 6-, & 8-Drum Workstations™
- QVAC™ 100
- Sorbents
- Spill Kits

8.2.12: Drum, Waste Water Containment (AEL Ref# 08D2-11-WWCD)

- Poly-Overpack® 95 Salvage Drum

SECTION 9-MEDICAL SUPPLIES

9.2.3.2: Supplies, Biohazard Disposal (AEL Ref# 09MS-03-BIOD)

- Poly-Overpack® Salvage Drums sizes 20-gallon through 110-gallon.
- Thermo-Sorb® Sorbents
- Medical Spill Kits
- Isolation Chambers
- Isolation Rooms

SECTION 16-AGRICULTURAL TERRORISM PREVENTION, RESPONSE AND MITIGATION

16.2.1: Container, Packing, Biohazard (AEL Ref# not specified)

- Poly-Overpack® Salvage Drums sizes 20-gallon through 110-gallon.
- Spill Kits



For further enquiries, please contact your local **Aztec Chemicals** Representative. Alternatively, please contact Customer Services: 01270 655500 Fax: 01270 655501 E-mail: info@aztecchemicals.com www.aztecchemicals.com